


01 | Functional Adjacency Model

Concept bubble diagram showing functional relationships between programme zones. Bubble sizes are illustrative, not measured. All areas subject to design development.

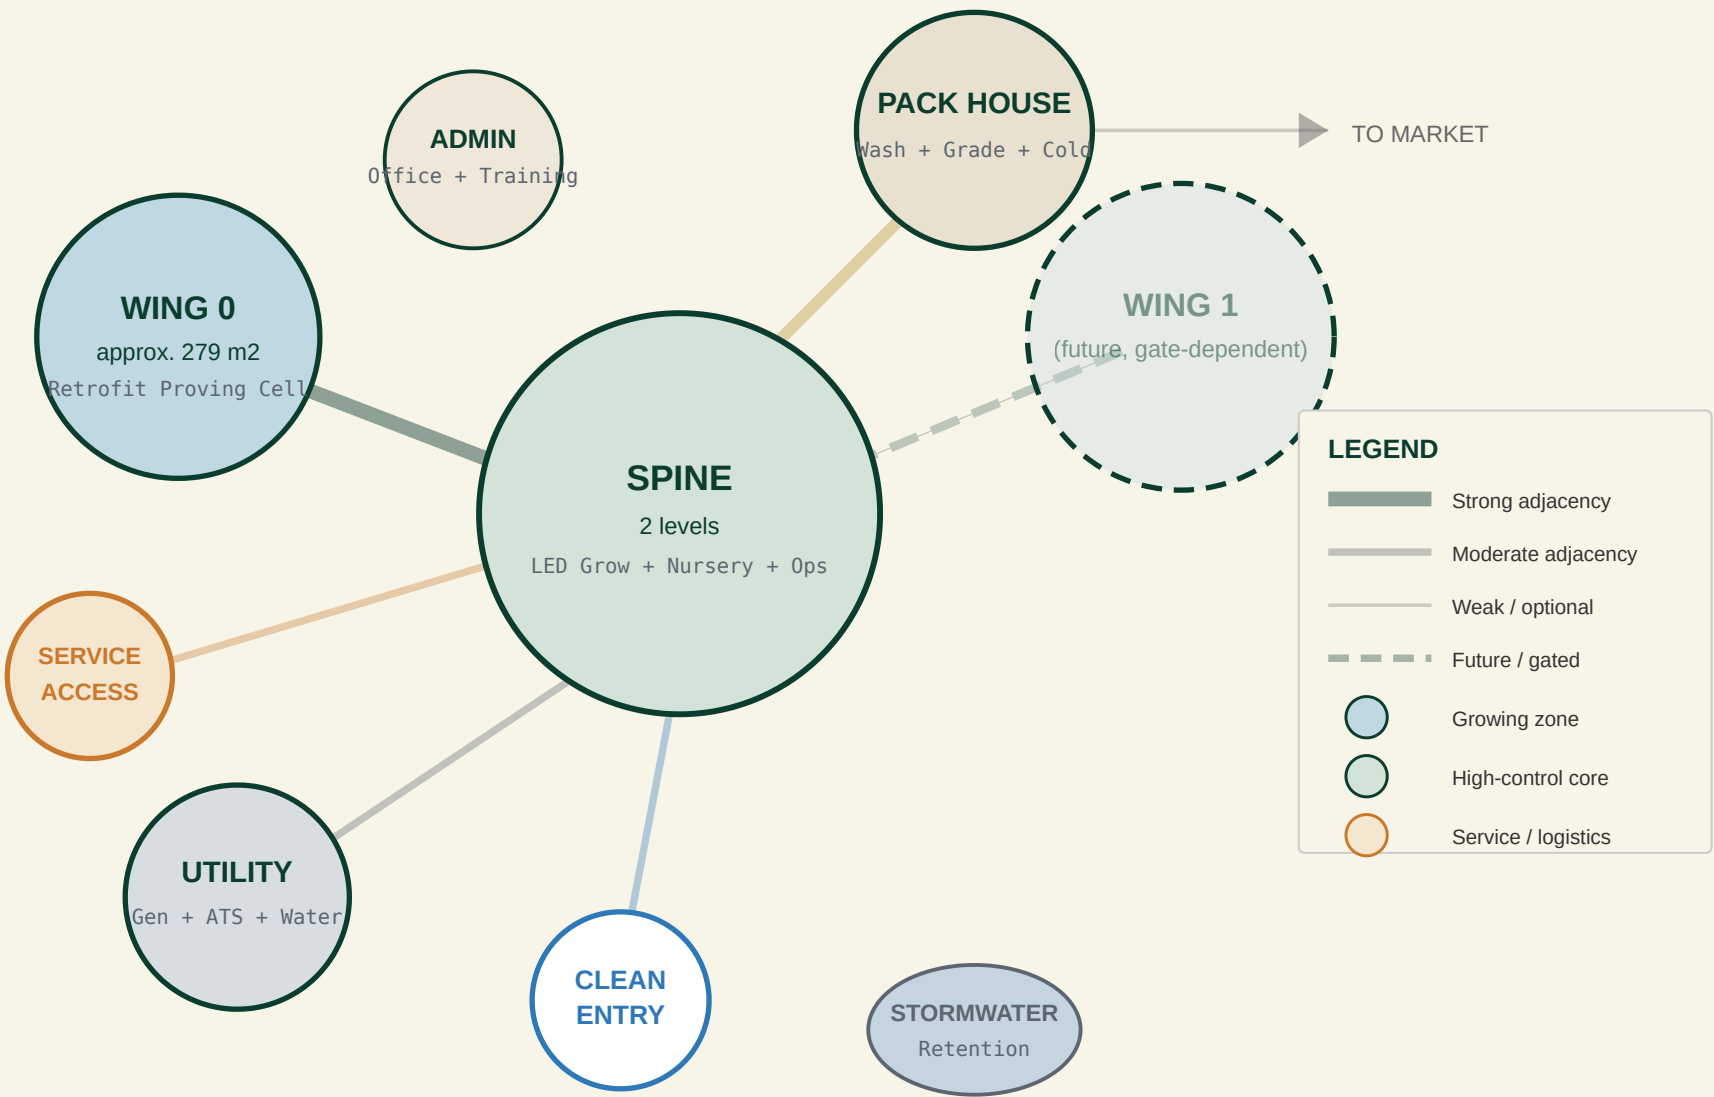

TECHNICAL NOTES

N1 | Concept status. This diagram shows desired functional proximities only. No dimensions, structural grids, or floor areas have been committed. All bubble sizes are illustrative.

N2 | Wing 0 area. Existing structure is approximately 279 m2, subject to verification by measured survey. Previous references to 300 m2 were rounded estimates.


N3 | Adjacency logic. Line weight indicates strength of desired proximity. Strong adjacencies (solid heavy lines) reflect operational necessities: produce flow, environmental isolation, biosecurity. Dashed connections indicate gate-dependent future phases.

N4 | Butterfly flow. The adjacency pattern follows a five-flow biosecurity model: People, Inputs, Harvest, Waste, and Maintenance. Each flow has a distinct entry/exit path through the programme. See T15 for flow detail.

All drawings NTS. Concept design only. Not for construction, costing, or regulatory submission.

02 | Coordinated Massing

Orthographic massing study showing relative building volumes. No height commitments, no structural system selected. All proportions illustrative.

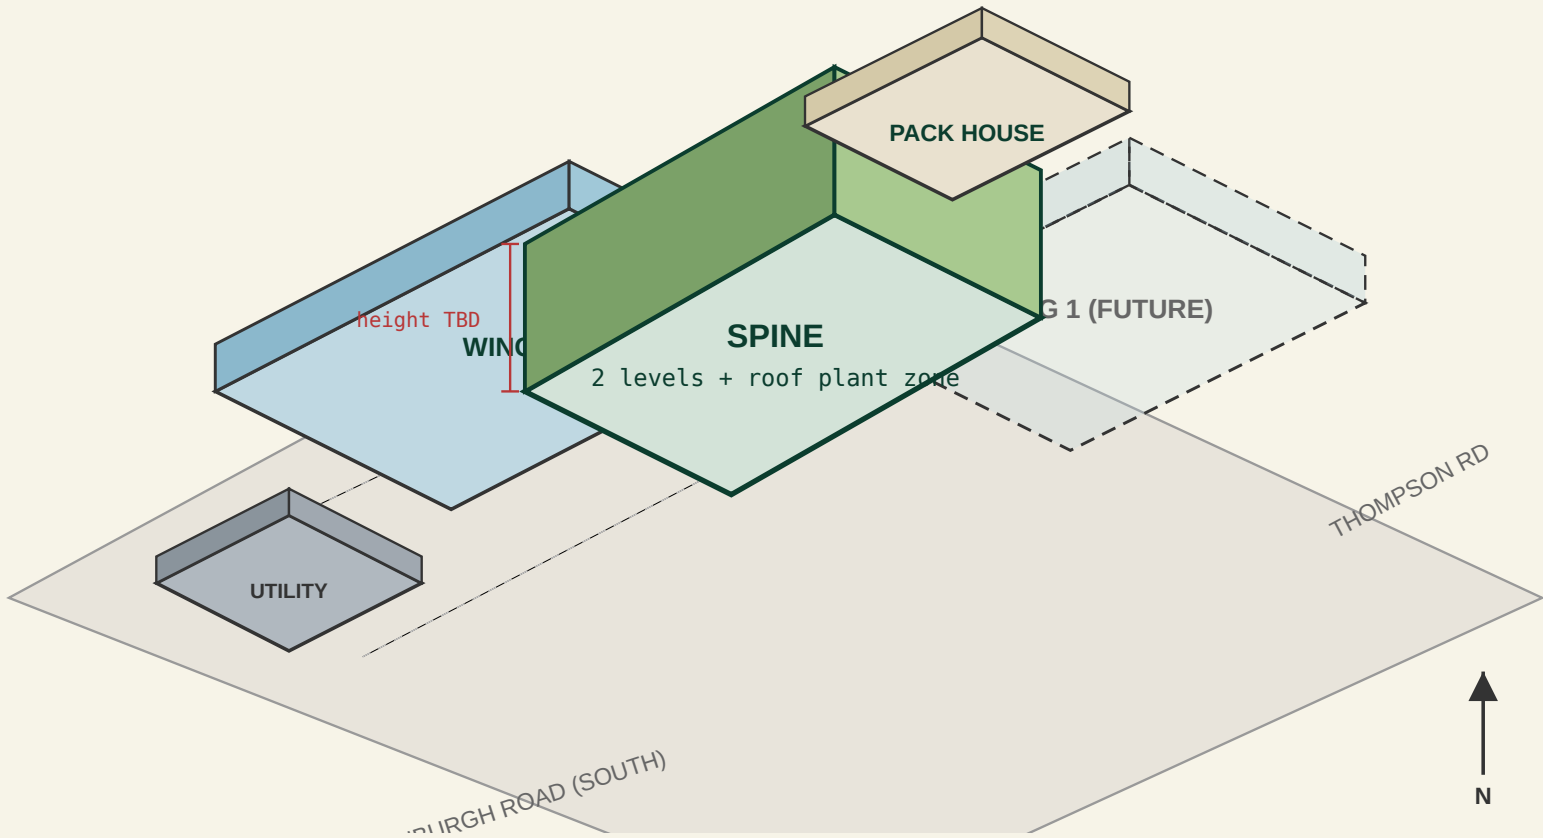

TECHNICAL NOTES

N1 | No height commitments. Building heights shown are proportional only. Actual heights will be determined during detailed design following structural analysis, equipment selection, and code review.

N2 | Spine massing. The Spine is shown as two occupied levels plus a roof plant zone. Clear height requirements for grow rooms (LED vertical farm) and ground-floor operations will drive final storey heights. No structural system has been selected.


N3 | Wing 1 conditional. Wing 1 is gate-dependent; its massing is shown for context only. Trigger criteria for Wing 1 construction are defined in T12.

N4 | Orientation. North arrow shown. Solar orientation, prevailing wind, and hurricane exposure analysis required before finalising building placement and orientation.

No structural grid, no bay spacing, no column positions. Heights not dimensioned. Roof slopes, parapets, and mechanical screening not shown.

03 | Site Constraints and Verification Overlay

Items requiring survey, investigation, or third-party confirmation before design development. No site boundary dimensions assumed. No scale.

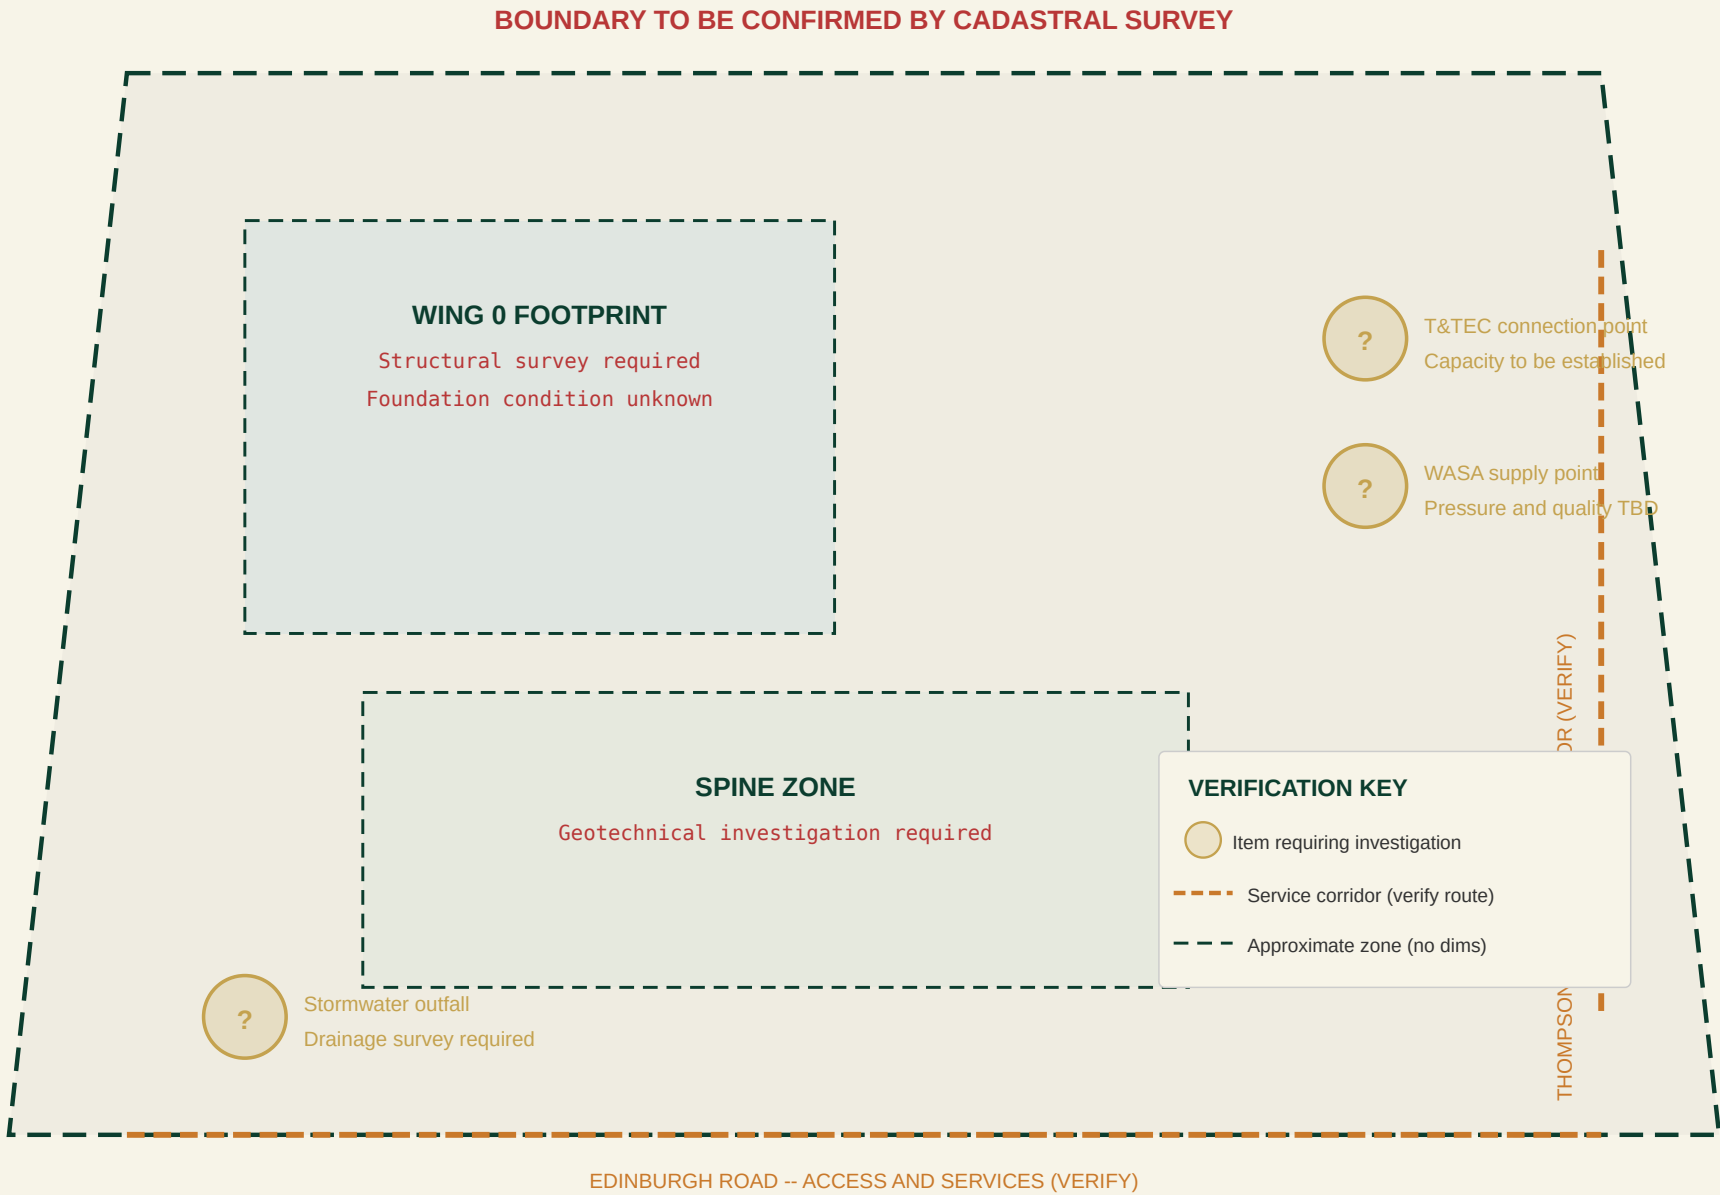

TECHNICAL NOTES

N1 | No boundary assumed. Site boundary shown is approximate only. No dimensions have been assumed. A cadastral survey and title verification are required before any site plan can be produced.

N2 | Geotechnical. No soil investigation has been conducted. Foundation design cannot proceed without bore logs, bearing capacity data, and water table depth. Seismic zone classification to be confirmed (zone to be investigated, not assumed).


N3 | Existing structure. Wing 0 is an existing building requiring structural survey, including roof condition, column grid verification, and foundation adequacy for reuse as a controlled-environment growing space.

N4 | Utility connections. T&TEC supply point, WASA connection, and stormwater outfall locations are all unverified. Capacity and availability must be established through formal applications.

Every item marked "?" requires investigation before design can proceed. No setbacks, easements, or zoning constraints have been mapped.

04 | Pilot Site Plan -- Shared Concept Arrangement

Schematic block arrangement for pilot phase. Same base map as T03. No dimensions, no setbacks confirmed. All positions illustrative.

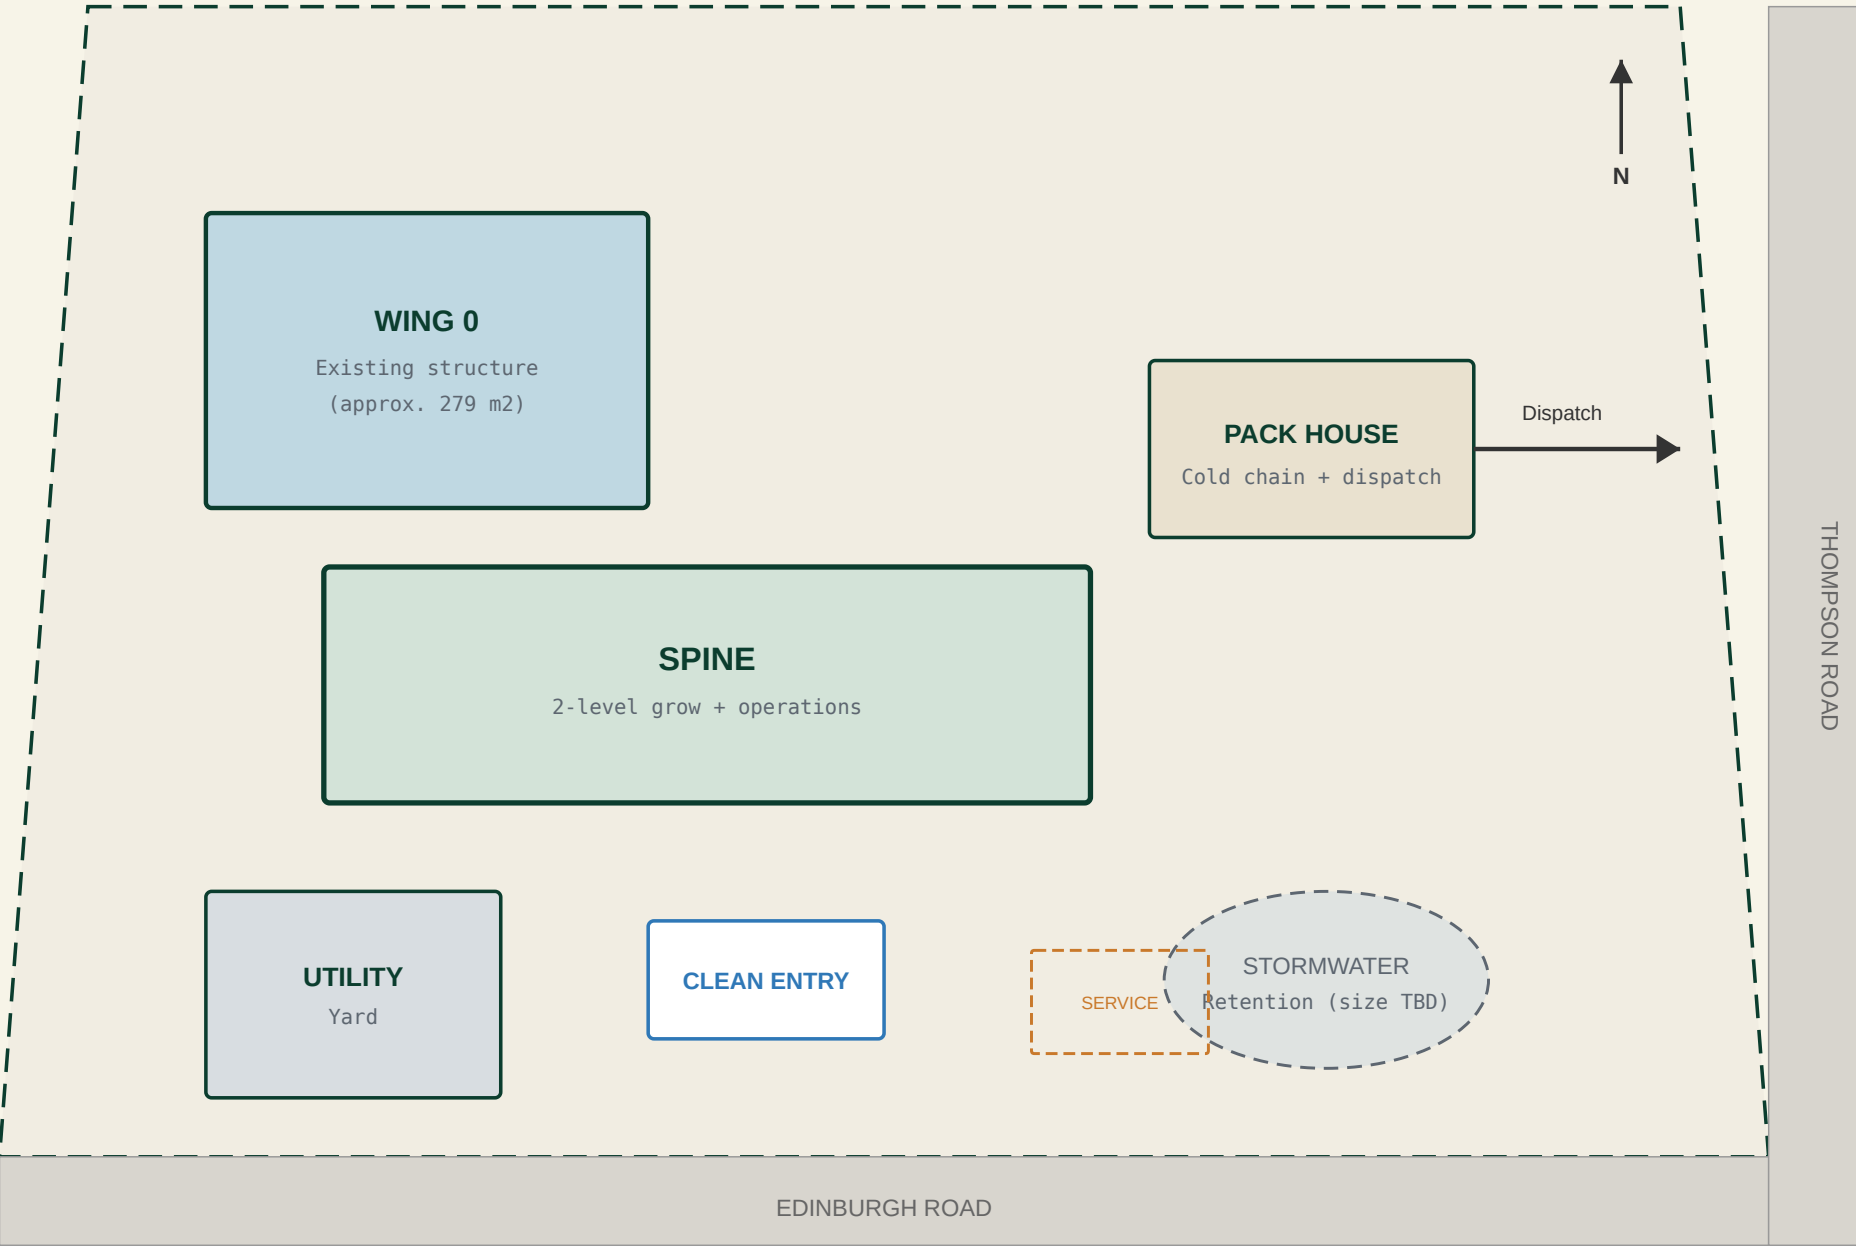

TECHNICAL NOTES

N1 | Schematic only. Block positions are illustrative. No setback dimensions, no turning-circle radii, no parking counts. Positions will be refined following cadastral survey, geotechnical investigation, and utility mapping.

N2 | Access. Vehicle access from Edinburgh Road or Thompson Road to be determined. Fire tender access, turning head, and emergency vehicle requirements per local fire code (to be confirmed with the fire service).

N3 | Same base map. This plan shares its site outline with T03. All constraints and unknowns identified there apply here.


N4 | Landscaping and external works. Not shown. Perimeter security, lighting, drainage swales, and landscaping to be designed during detailed phases. EMA CEC requirements to be established.

No dock height, no truck-bed standard, no operating hours assumed. Loading and dispatch arrangements require throughput analysis (see T19).


05 | Spine Floor-Use Diagrams

Room allocation concept for Spine building, 2 levels. No internal design, no partition layout, no furniture. Room sizes to be determined by programme brief.

GROUND FLOOR

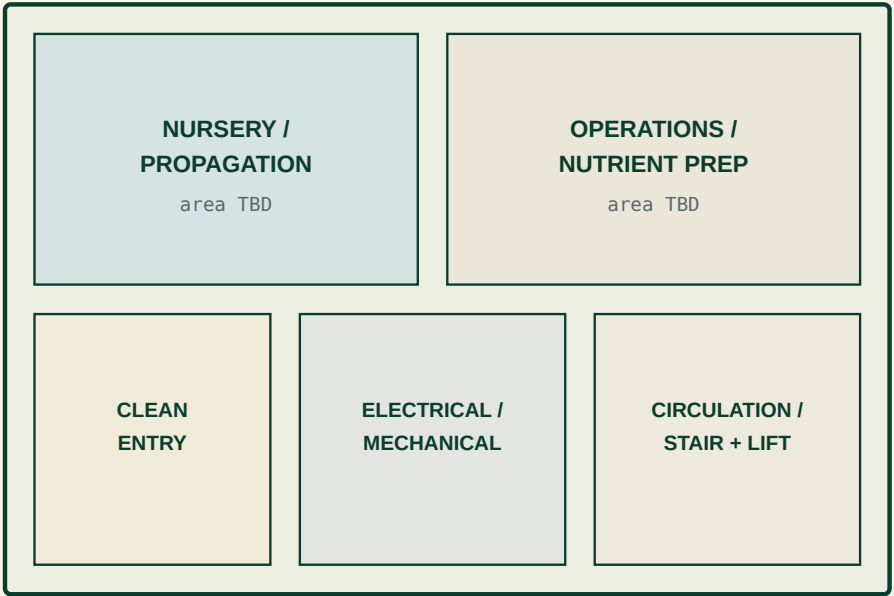

FIRST FLOOR

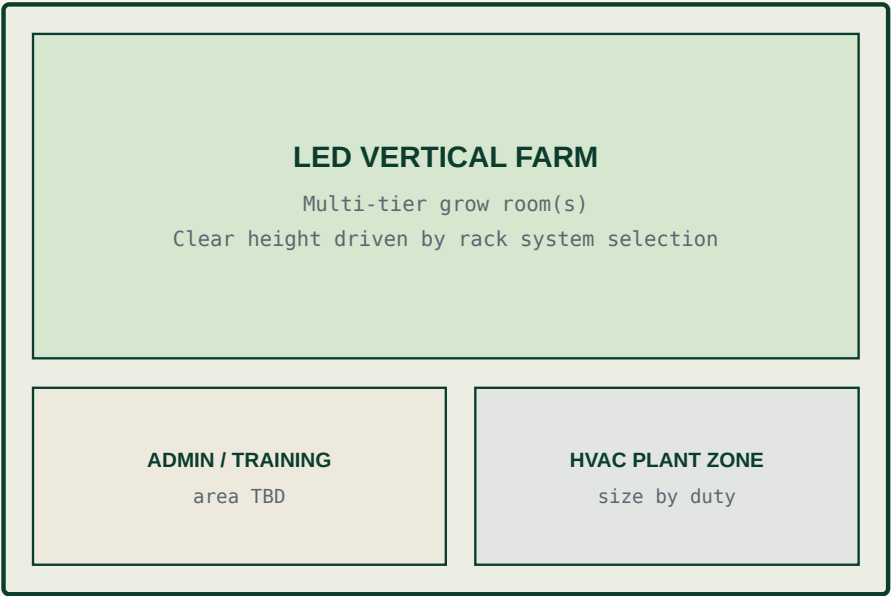

TECHNICAL NOTES

N1 | Allocation only. These diagrams show room allocation and adjacency, not internal design. No partition layouts, door swings, furniture, or equipment positions. Room sizes will be determined by the detailed programme brief and operational analysis.


N2 | Clear heights. First-floor grow room clear height depends on vertical rack system selection (not yet made). Ground-floor operational spaces require sufficient height for nutrient mixing equipment and service runs, also to be determined.

N3 | Circulation. Stair and lift positions are indicative. Fire escape routes require code analysis. Accessibility requirements per local building code (to be established).

No room dimensions, no door schedules, no finishes. All areas marked "TBD" pending design development.


SECTION -- SEE T06

ROOF LEVEL (INDICATIVE)

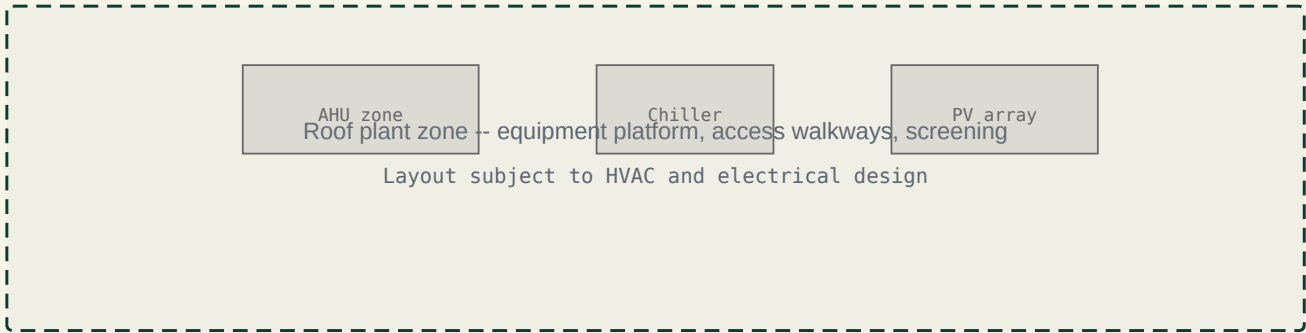

06 | Spine Section and Access Intent

Diagrammatic cross-section showing 2 occupied levels. No dimensions, no structural sizes, no floor-to-floor heights committed. Proportions illustrative only.

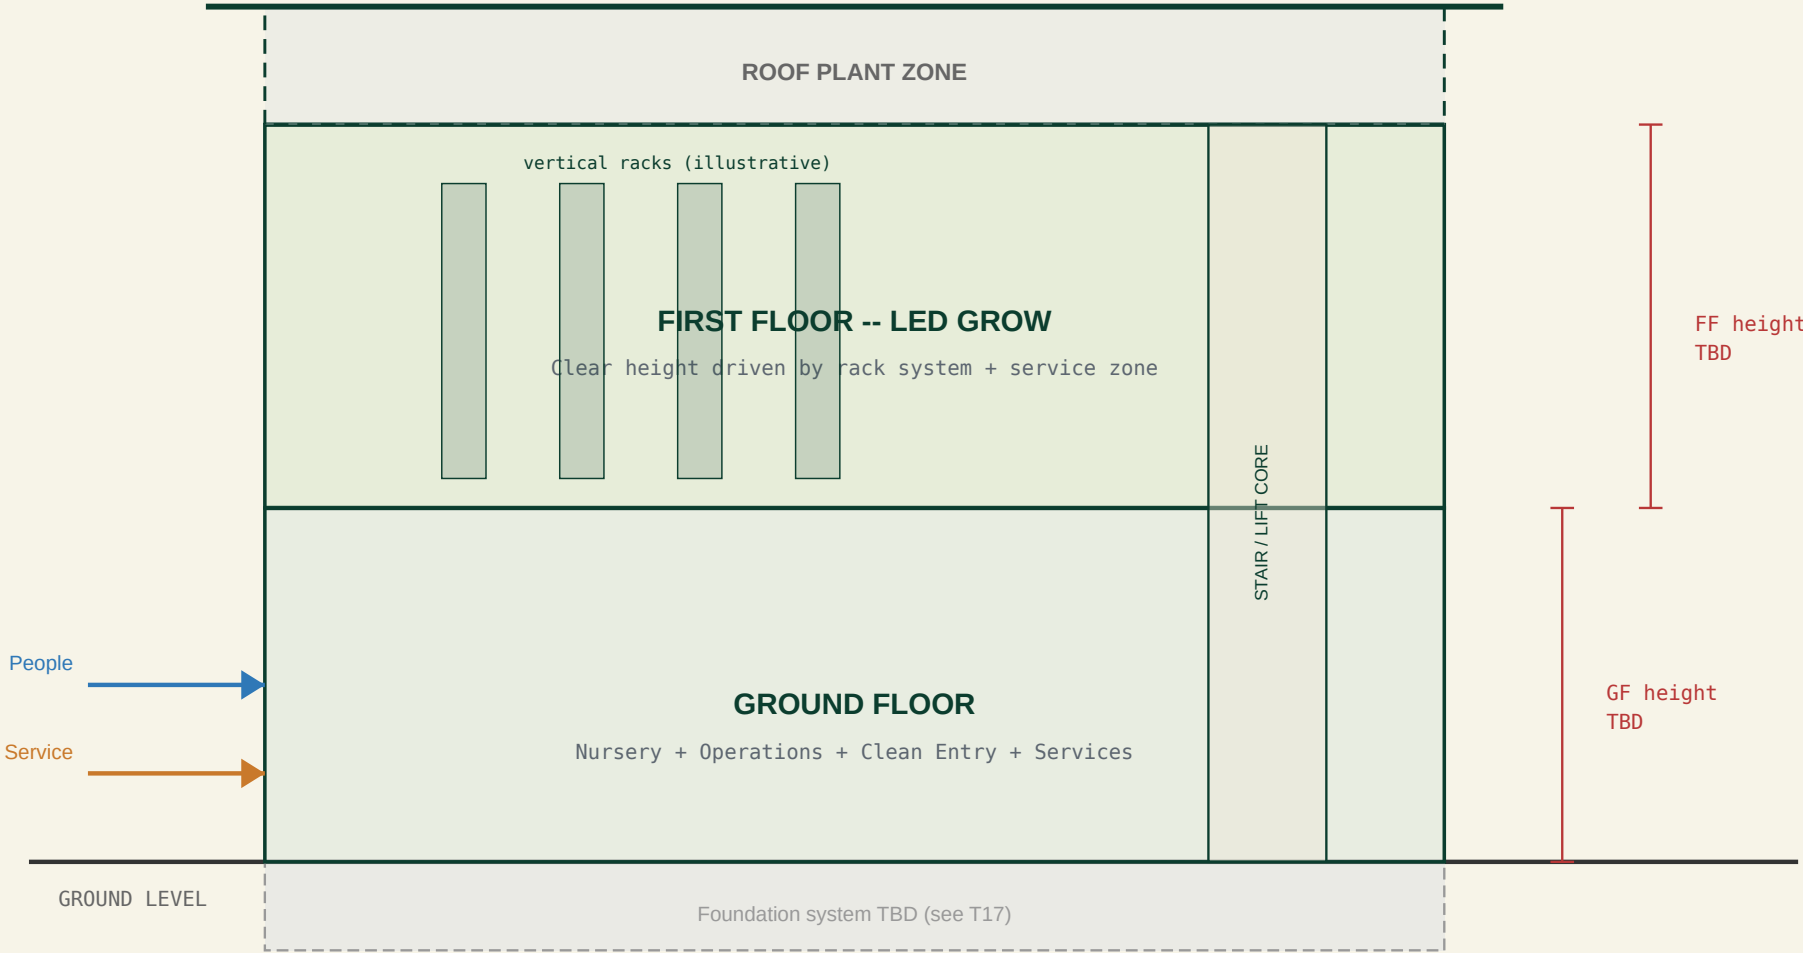

TECHNICAL NOTES

N1 | Exactly two levels. The Spine is designed as a two-storey building plus a roof plant zone. No mezzanines or additional levels are proposed at this stage. Floor-to-floor heights will be determined by equipment clear-height requirements.

N2 | No structural sizes. No column sizes, beam depths, slab thicknesses, or member specifications have been selected. The structural system is concept-stage only (see T17 for the structural design brief).

N3 | Access intent. People and service access are shown at concept level. The biosecurity model (T15) requires separated flows. Vertical circulation core position is indicative.

No floor-to-floor dimensions. No structural grid. Foundation type subject to geotechnical investigation. All heights proportional only.


Crop-specific process flow diagram. NOT a universal process -- temperature, humidity, and handling differ by crop and maturity stage (UC Davis). No equipment selected.



Process flow is crop-specific. UC Davis postharvest guidelines should be referenced for each crop grown. No production volumes or cycle times assumed.

08 | Water and Nutrient Isolation Schematic

Functional diagram showing water treatment and nutrient delivery isolation. NOT a P&ID -- no pipe sizes, no valve schedules, no tank volumes. Concept arrangement only.

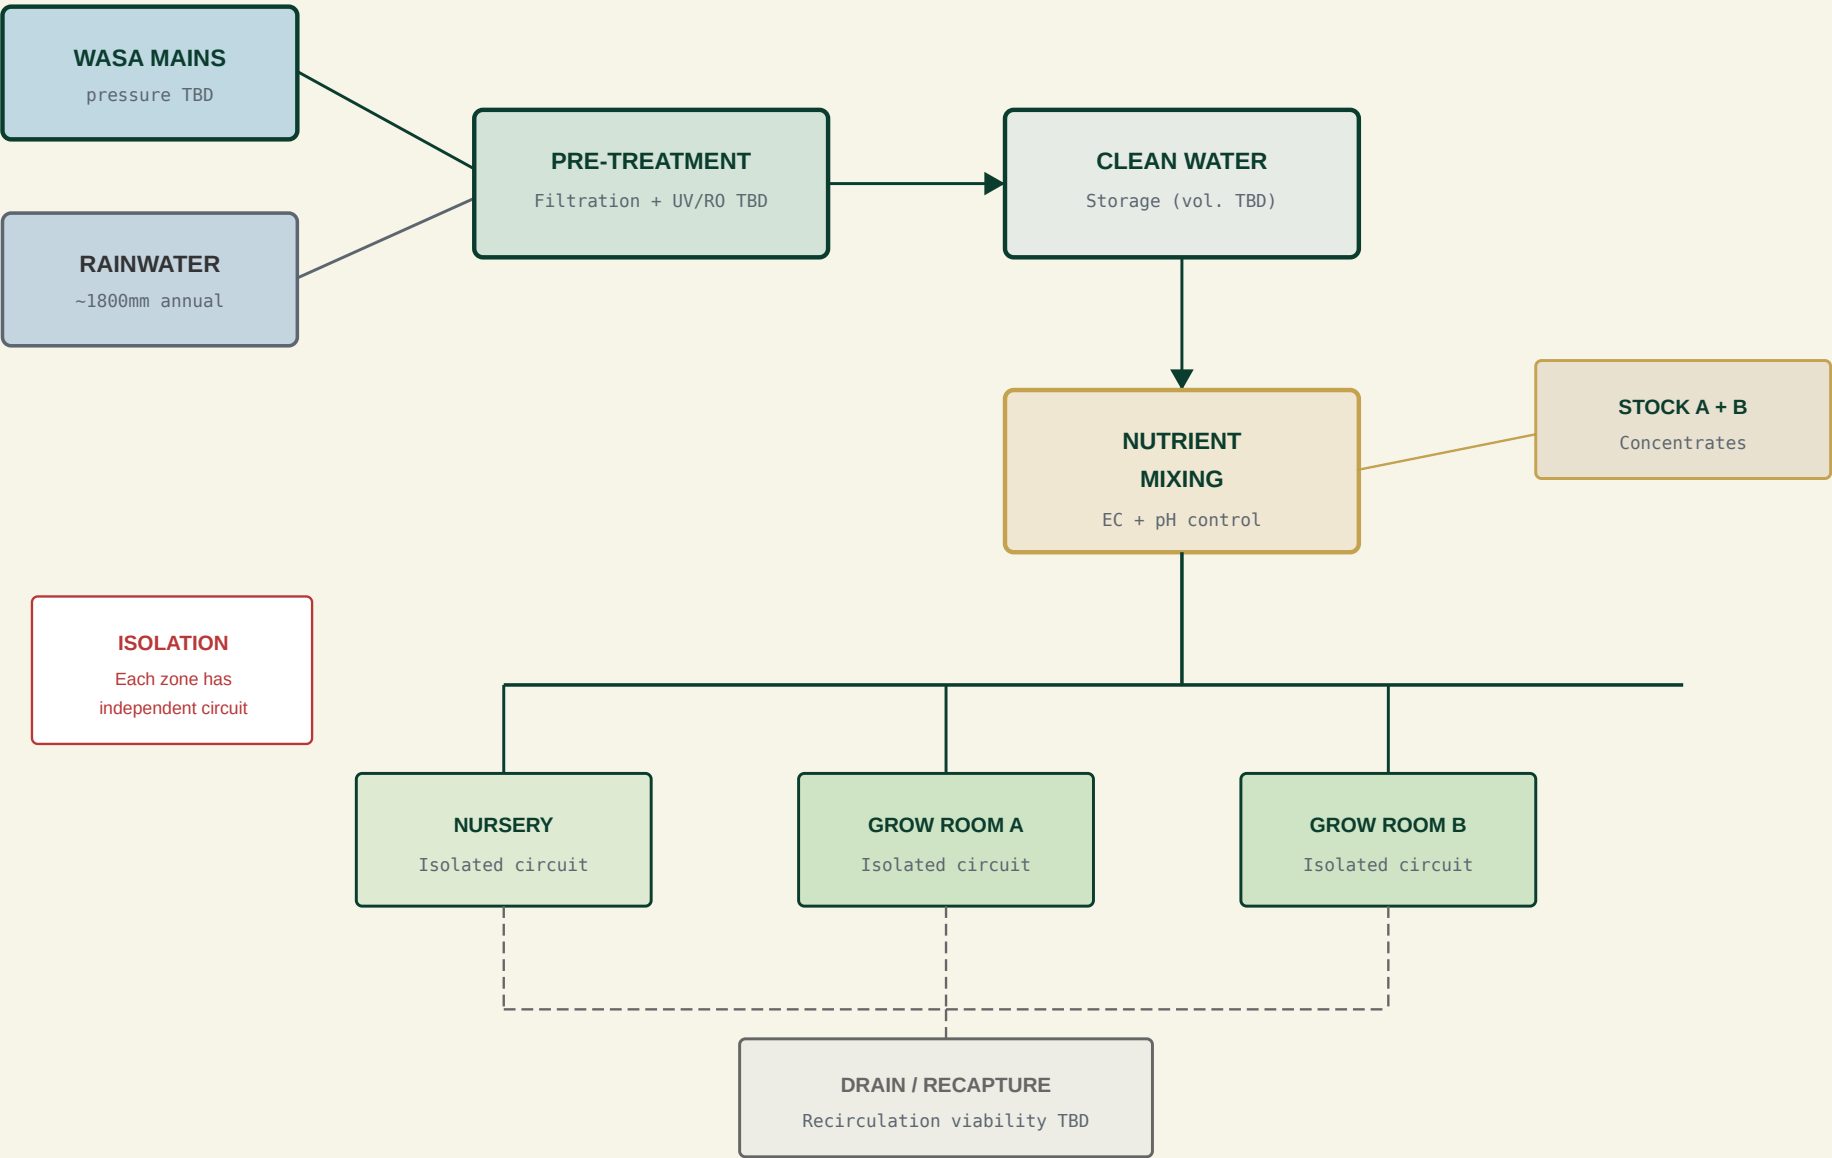

TECHNICAL NOTES

N1 | Functional only. This is a functional schematic, not a piping and instrumentation diagram. No pipe sizes, valve types, pump specifications, or tank volumes have been determined.




N2 | Zone isolation. Each growing zone must have an independently controllable nutrient circuit to prevent cross-contamination and allow crop-specific formulations. Isolation valving and backflow prevention are required but not detailed here.

N3 | Water treatment. Pre-treatment system (filtration, UV, RO) to be specified based on WASA water quality analysis. Rainwater harvesting capacity depends on roof area (not yet finalised) and annual rainfall (~1800mm).

No tank volumes, no pipe diameters, no pump curves. Treatment technology selection requires water quality data not yet available.

09 | Grow-System Options

Illustrative examples of candidate grow systems. NOT fabrication details -- no specific products, no structural loads, no services connections. Selection requires crop trials.

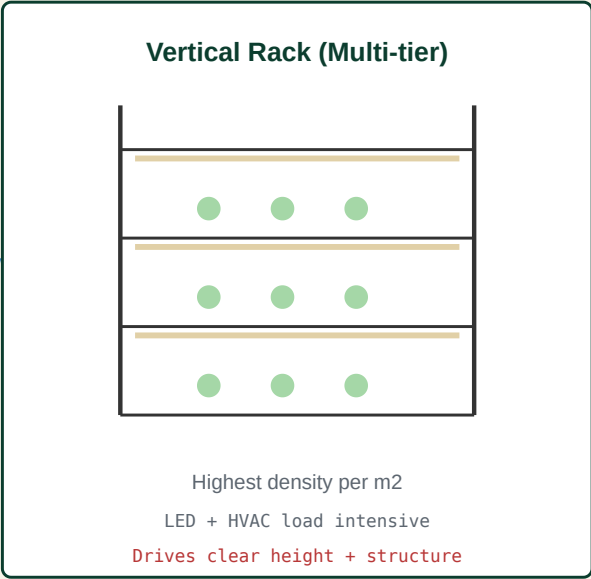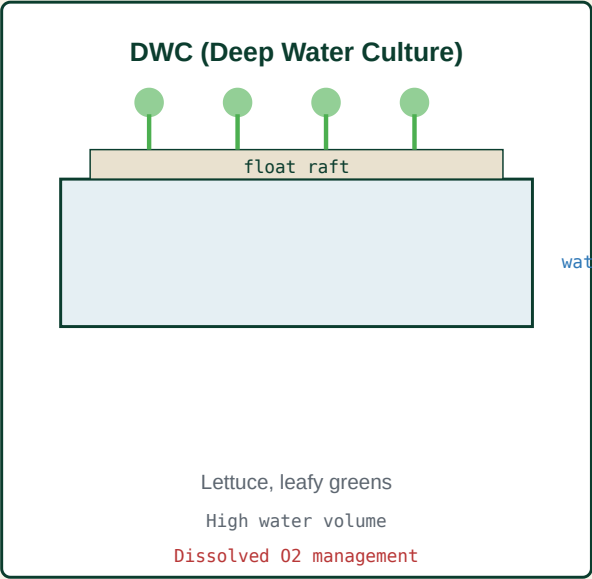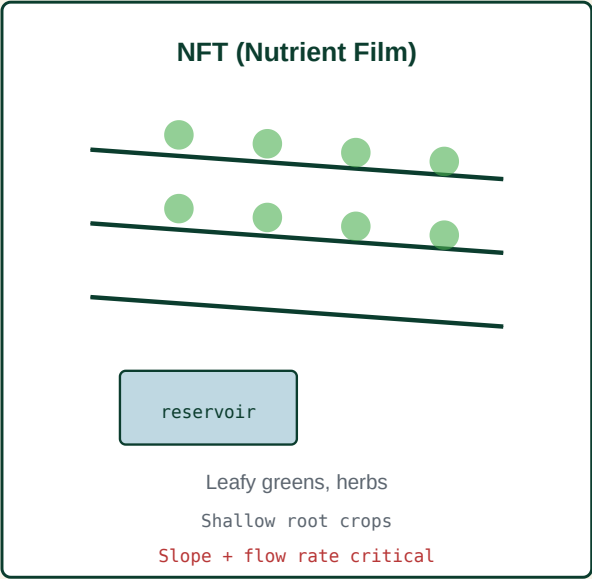

CONCEPT COMPARISON (illustrative -- selection requires crop trials)

Criterion	NFT	DWC	Vertical Rack
Water use	Low	High	Low-Medium
Energy (lighting)	Medium	Medium	High
Crop suitability	Herbs, leafy	Lettuce, leafy	Herbs, microgreens
Structural impact	Low	Moderate (water mass)	High (multi-tier load)

TECHNICAL NOTES

N1 | Illustrative only. These are generic representations of grow-system types, not selected products or fabrication drawings. No specific manufacturer, model, or specification is implied.

N2 | Selection criteria. Grow-system selection depends on: target crops, production volume targets, available building clear height, structural capacity, electrical supply, water availability, and labour model. All require analysis not yet performed.

N3 | Structural impact. Vertical rack systems impose significant floor loading. DWC systems impose significant water mass. Both drive structural design (see T17). The structural engineer cannot proceed without grow-system selection.

No products selected. No fabrication details. Comparison matrix is conceptual only and does not constitute a recommendation.

10 | HVAC and Greenhouse Climate

Climate control concept diagram. No equipment capacity selected, no duct sizes, no refrigerant types. Duty-based descriptions only. T&T ambient: ~31 C avg, 80%+ RH.

T&T AMBIENT

~31 C average temperature
80%+ relative humidity
~1800mm annual rainfall

SPINE -- LED GROW ROOMS

Sealed environment, full climate control

COOLING DUTY
capacity by heat load calc

DEHUMIDIFICATION
duty by transpiration

CO2 ENRICHMENT
if sealed environment

AIR HANDLING
filtration + distribution

WING 0 -- GREENHOUSE RETROFIT

Semi-controlled environment (existing structure)

VENTILATION
natural + fan-assisted

SHADE / SCREEN
solar gain management

PACK HOUSE

Cooling for post-harvest: crop-specific temperatures (see T07)
NOT universal 4 C -- basil, tomato require higher temps

HEAT SOURCES

LED lighting (primary)
Solar gain (envelope)
Equipment motors
Plant transpiration (latent)
Infiltration / ventilation

Total cooling duty:
requires detailed heat
load calculation (not done)

LED wattage drives calc

TECHNICAL NOTES

N1 | No capacity selected. No cooling tonnage, airflow rates, or equipment models have been specified. HVAC sizing requires a detailed heat-load calculation that depends on LED wattage, building envelope, and grow-room configuration -- none of which have been finalised.


N2 | Dehumidification critical. In T&T's high-humidity climate (80%+ RH), dehumidification is a primary design challenge. The latent load from plant transpiration adds to ambient humidity. This drives equipment selection significantly.

N3 | Two distinct environments. The Spine (sealed, fully controlled) and Wing 0 (semi-controlled greenhouse retrofit) require fundamentally different HVAC approaches. They should not be served by the same system.

No duct sizes, no refrigerant types, no equipment schedules. Energy consumption estimates require completed HVAC design.

11 | Electrical Distribution and Survival

Functional electrical concept. No cable sizes, no panel schedules, no generator kVA. Roles clarified: T&TEC = supply/connection; Government Electrical Inspectorate = installation certification.

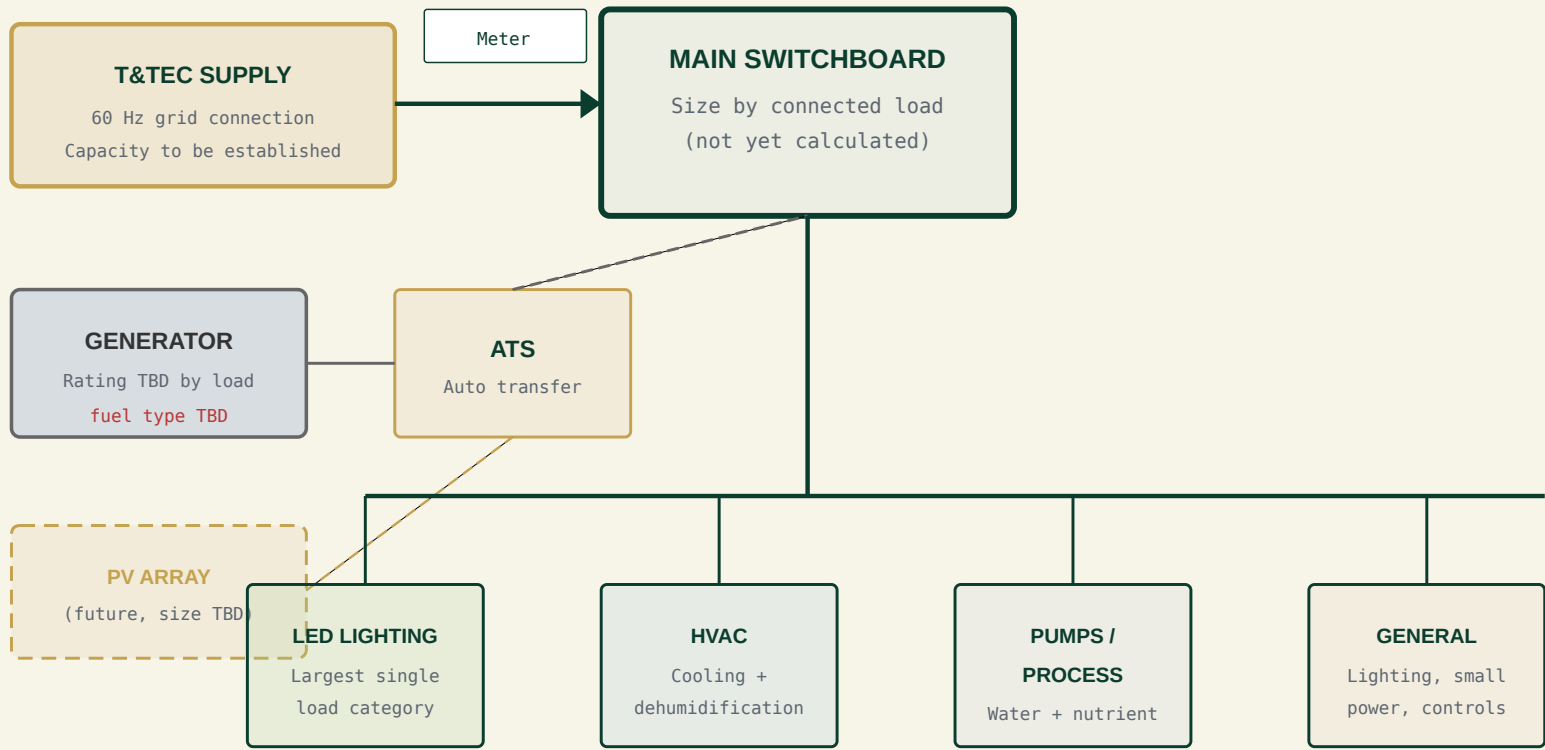

APPROVAL RESPONSIBILITIES

T&TEC: grid supply, connection, metering, tariff
Gov. Electrical Inspectorate: installation certification
These are separate entities with distinct roles.

TECHNICAL NOTES

N1 | No sizes. No cable sizes, no breaker ratings, no panel schedules, no generator kVA rating. All electrical sizing requires a connected-load analysis that depends on equipment selections not yet made (LED wattage, HVAC, pumps).

N2 | T&TEC vs Inspectorate. T&TEC (Trinidad and Tobago Electricity Commission) is responsible for grid supply, connection, and metering. The Government Electrical Inspectorate certifies the installation. These are separate bodies; do not conflate their roles.

N3 | Survival strategy. Generator provides backup for crop-critical loads (HVAC, lighting, controls). ATS (automatic transfer switch) manages switchover. Generator run-time and fuel storage depend on risk assessment (hurricane duration, grid reliability data).

No generator kVA. No cable sizes. T&TEC tariff and connection capacity to be established through formal application. Inspectorate approval required before energisation.

12 | Phasing and Investment Gates

Stage-gate model for programme delivery (Stages 0-4). No calendar dates, no cost estimates. Each gate requires evidence before proceeding.



GATE 1 EVIDENCE REQUIRED

Cadastral survey complete
Geotechnical report received
T&TEC connection capacity confirmed
WASA supply confirmed
EMA CEC requirements established
Crop trial results from controlled tests

GATE 2 EVIDENCE REQUIRED

Wing 0 operational for 2+ crop cycles
Yield data against projections
Energy cost actual vs. budget
Market price + demand validation
Labour model proven
Electrical Inspectorate cert. for Wing 0

GATE 3 EVIDENCE REQUIRED

Spine operational + profitable
Demand exceeds pilot capacity
Financing secured for expansion
Environmental monitoring data
Community engagement complete
Scale-site EIA if required by EMA

TECHNICAL NOTES

N1 | No calendar. No dates, timelines, or durations are shown. Each gate is evidence-based, not schedule-based. A gate cannot be passed until its evidence requirements are met, regardless of elapsed time.

N2 | Prove before scale. The programme's core principle is that each stage proves the next. Wing 0 proves the grow concept before Spine construction is committed. The Spine proves commercial viability before campus expansion is considered.

N3 | Stages 3-4 conditional. Campus expansion and Wing 1 are not planned in detail. They exist as placeholders, contingent on all prior gates being passed and demand exceeding pilot capacity.

No cost estimates. No construction durations. Gate criteria are minimum requirements; additional conditions may emerge during design development.

13 | Modular Interfaces

Standardised interface strategy for maintainable, replaceable components. No specific connection details -- interface types and principles only.

TECHNICAL NOTES


N1 | Design for maintenance. The modular strategy prioritises the ability to replace or upgrade individual components (grow racks, HVAC units, control panels) without rebuilding the host structure. This drives interface standardisation.

N2 | Interface definition. Each "IF" point must be fully specified during detailed design, covering structural, MEP, environmental, and maintenance access requirements. At concept stage, only the principle is established.

N3 | Future-proofing. Standardised interfaces allow technology upgrades (e.g., new LED generations, improved HVAC) without structural modifications. This is a design intent, not a guarantee.

No specific connection details. Interface specifications require coordinated engineering design across all disciplines.

MODULAR INTERFACE PRINCIPLE

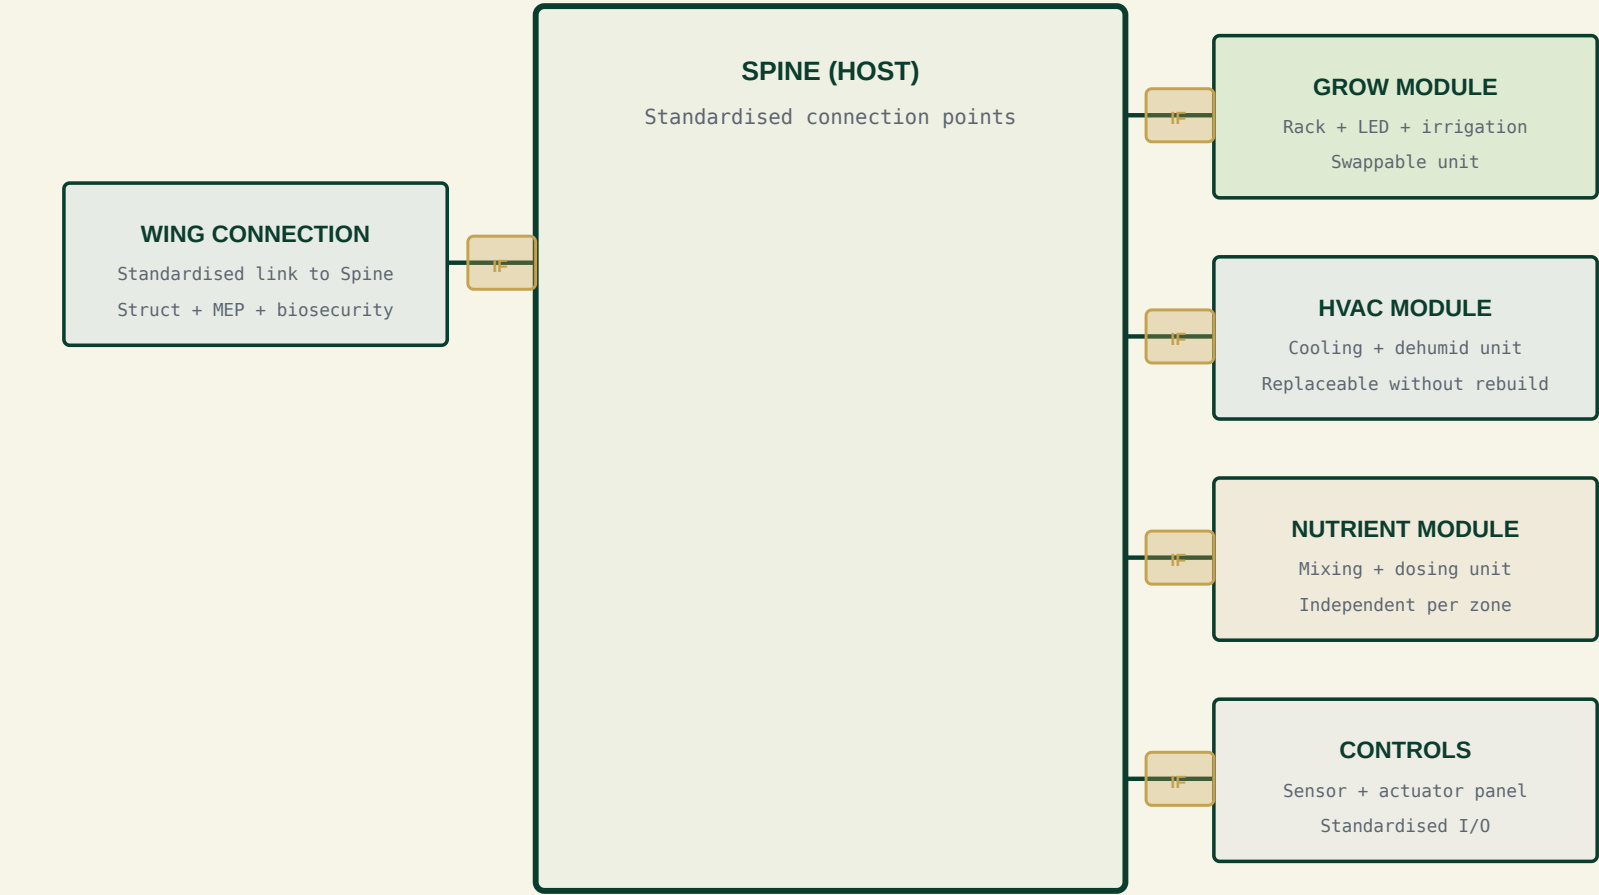


INTERFACE (IF) INCLUDES

- Structural: load path, fixing points, tolerances
- MEP: electrical connection, water in/out, data
- Environmental: air seal, thermal break, biosecurity barrier
- Maintenance: access for replacement without disruption

All interfaces are concept-stage. Detailed specification requires engineering design.

14 | Controls and Verification Topology

Local-first control architecture. No cloud dependency for critical operations. Network topology is concept only -- no hardware specified, no protocols committed.

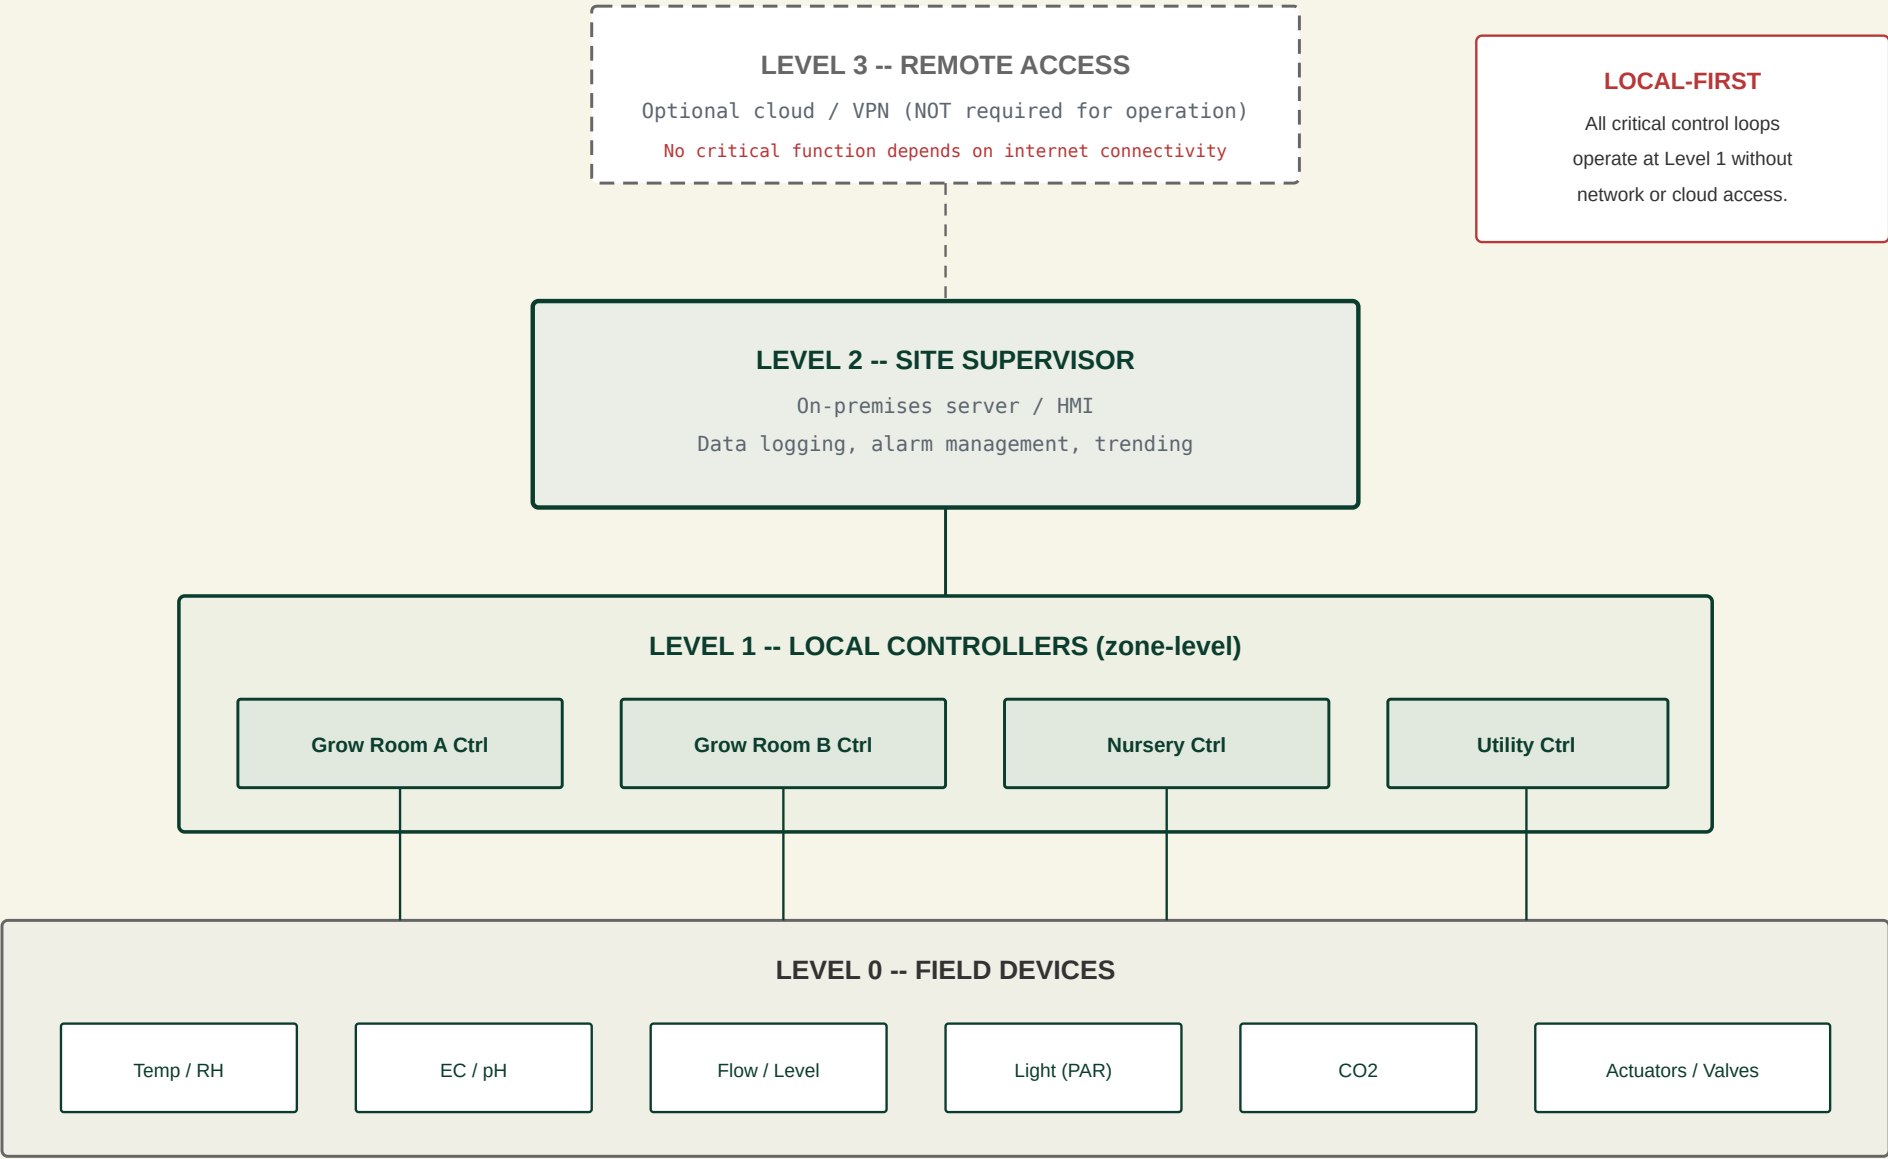

TECHNICAL NOTES

N1 | Local-first principle. Every critical control loop (temperature, humidity, nutrient dosing, lighting schedule) must execute at Level 1 without reliance on network connectivity, the site supervisor, or any cloud service. Internet loss must not cause crop loss.


N2 | No hardware specified. No PLC brands, no communication protocols, no network switches have been selected. The topology shows functional layers only. Protocol selection (Modbus, BACnet, MQTT, etc.) is a detailed design decision.

N3 | Verification. The controls architecture must support data logging for crop-performance verification (see T12 gate evidence). Sensor accuracy and calibration schedules are not defined at concept stage.

No protocols, no hardware, no cable runs. Cybersecurity requirements not addressed at concept stage. UPS for controllers to be sized with electrical design.

15 | Biosecurity and Traffic Interfaces

Five biosecurity flows: People, Inputs, Harvest, Waste, and Maintenance. Each flow has a distinct path. "Butterfly = flow logic, not building shape."

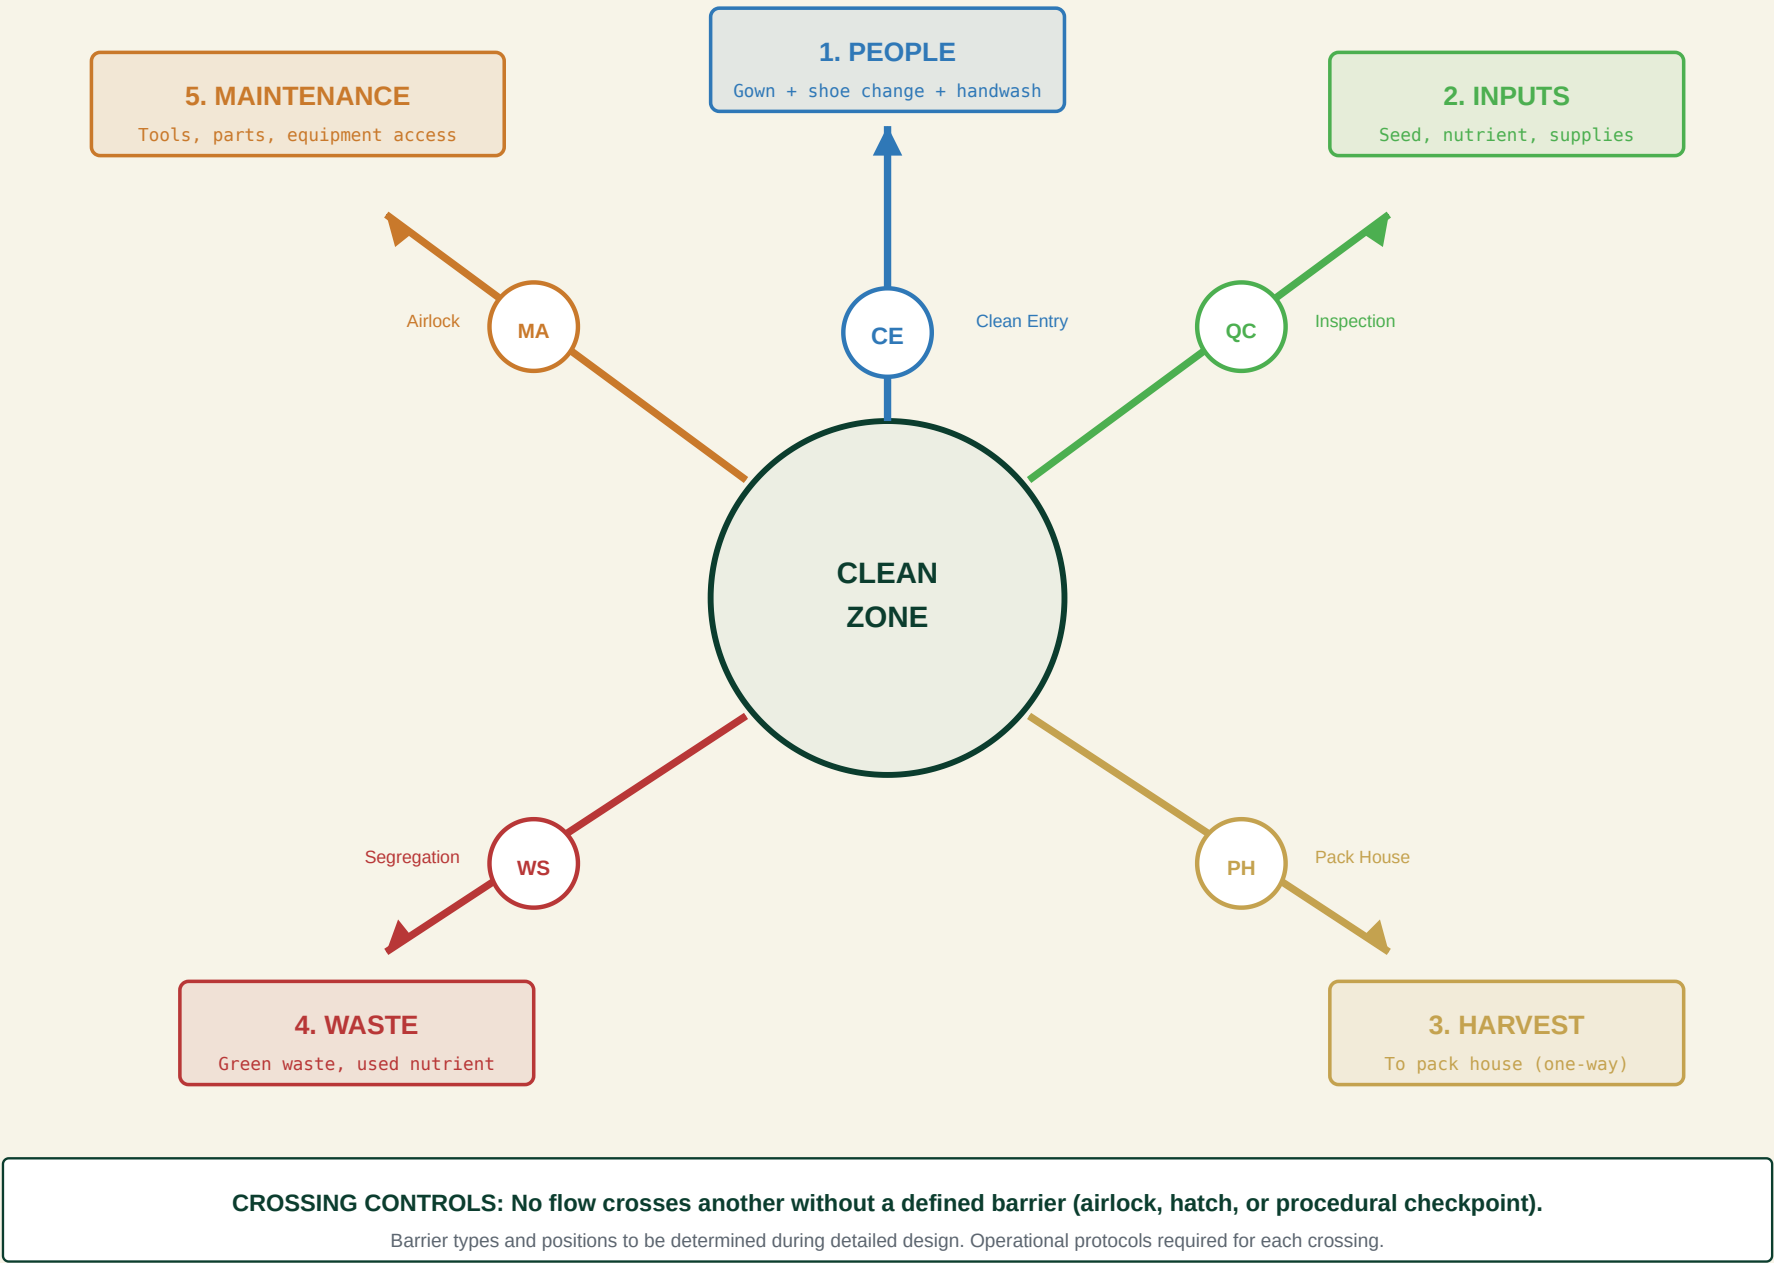


TECHNICAL NOTES

- N1 | Five flows, not four.** Maintenance is the fifth biosecurity flow, added to People, Inputs, Harvest, and Waste. Maintenance personnel and tools/parts carry contamination risk and require their own controlled path.
- N2 | Flow logic, not shape.** The "butterfly" refers to the radial separation of flows from a central clean zone, not to the building's physical shape. The building need not be butterfly-shaped.
- N3 | Practical controls.** Each crossing point requires a defined barrier: an airlock (for people/maintenance), a pass-through hatch (for inputs/harvest), or a procedural checkpoint (for waste). Barrier types are not selected at concept stage.
- No airlock sizes, no door schedules, no pressure differentials. Biosecurity protocols require operational design, not just architectural provisions.

16 | Conditional Scale-Site Masterplan

Aspirational campus layout IF all prior gates are passed. No site boundary dimensions. No scale. Entirely conditional on Stage 3-4 gate evidence.

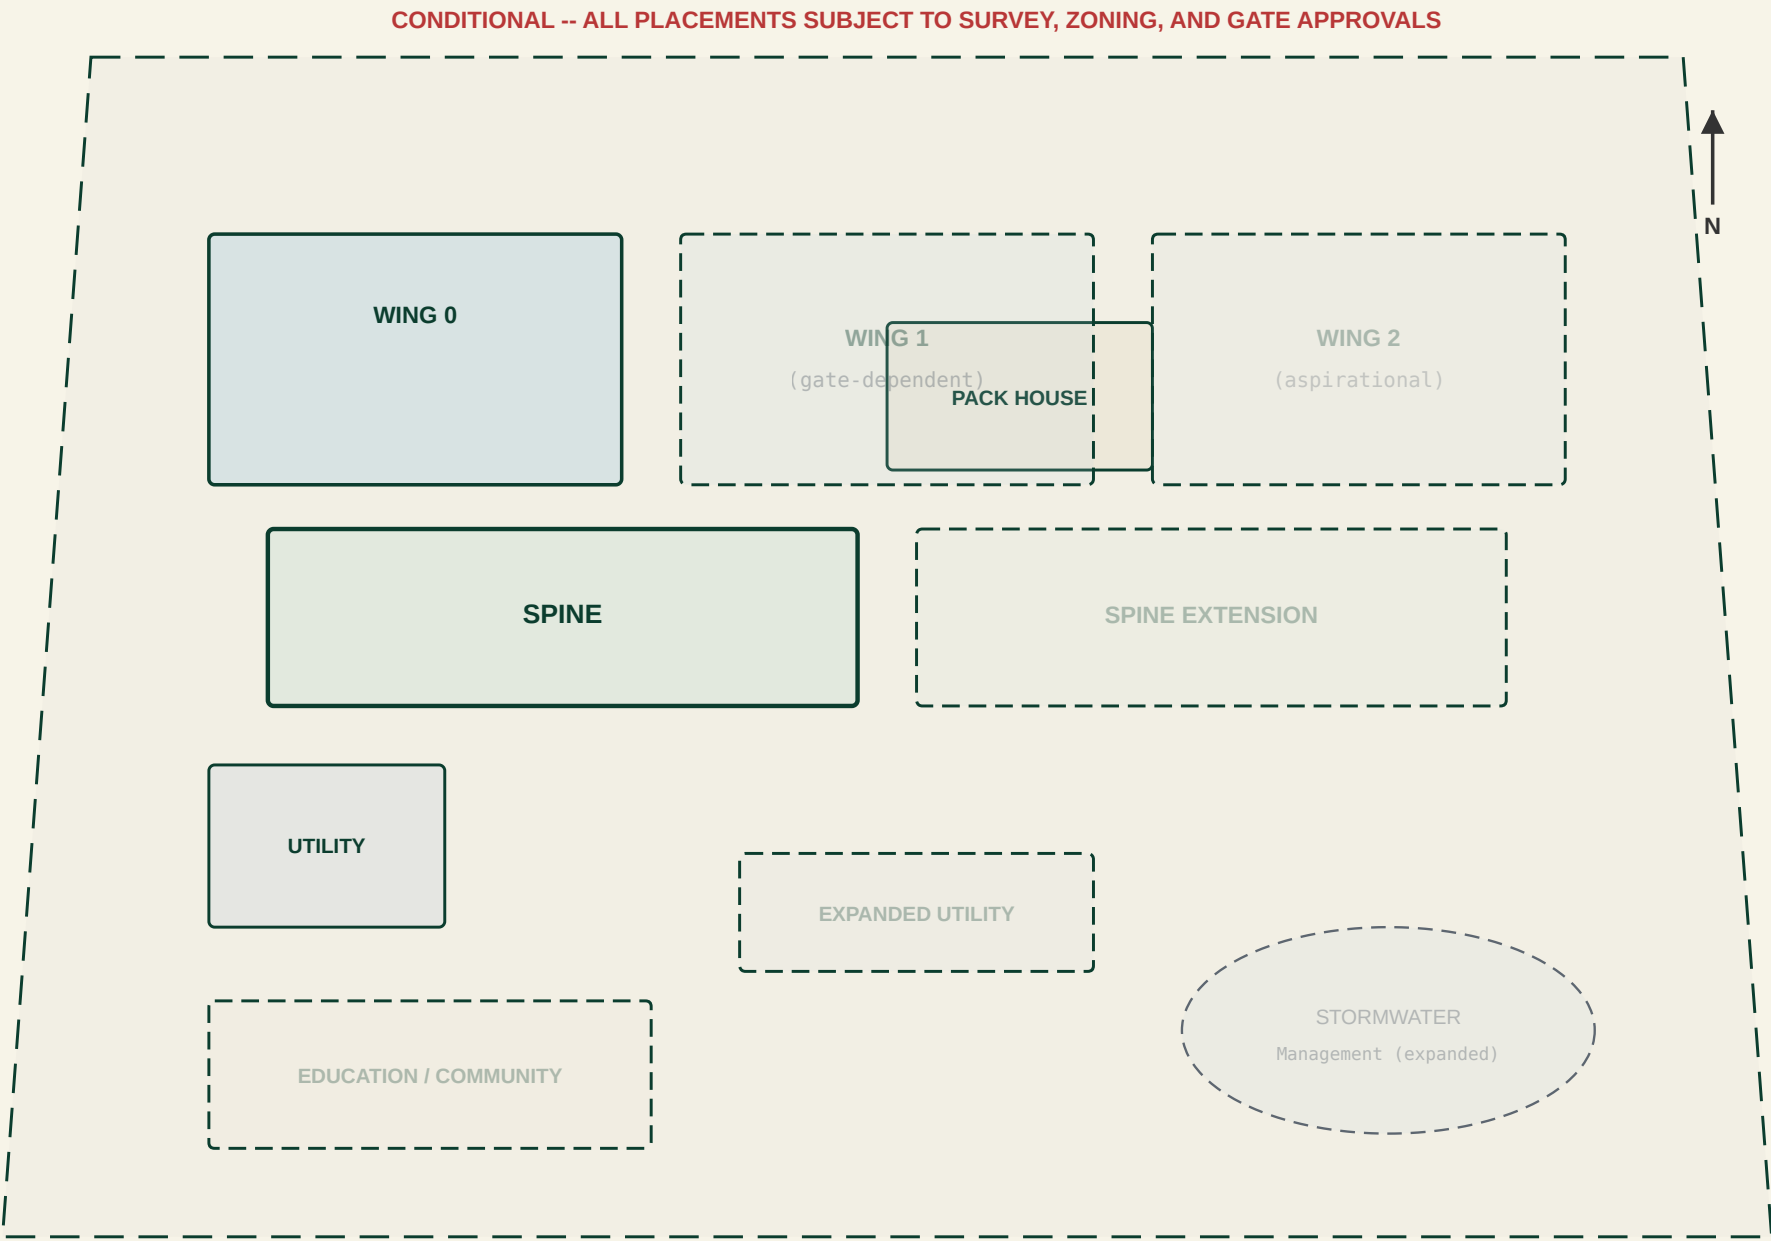

TECHNICAL NOTES

N1 | Entirely conditional. This masterplan is aspirational. No site boundary dimensions are assumed. No land area claim is made. Every element beyond the pilot cluster (Wing 0, Spine, Pack House, Utility) depends on passing the evidence gates defined in T12.


N2 | No scale claimed. No 1:2000 or any other scale is claimed. No boundary dimensions (no "250 x 260m" or similar). The site extent requires cadastral survey before any masterplan can be dimensioned.

N3 | EIA considerations. Scale-site development may trigger Environmental Impact Assessment requirements under EMA regulations. This must be determined early in Stage 3 planning.

This drawing cannot be used for land acquisition, planning applications, or investment prospectuses. It is a concept-stage aspiration diagram only.

17 | Structural and Foundation Concept

Design brief for structural engineer. No member sizes, no connection details, no reinforcement. Concept loadings and considerations only.

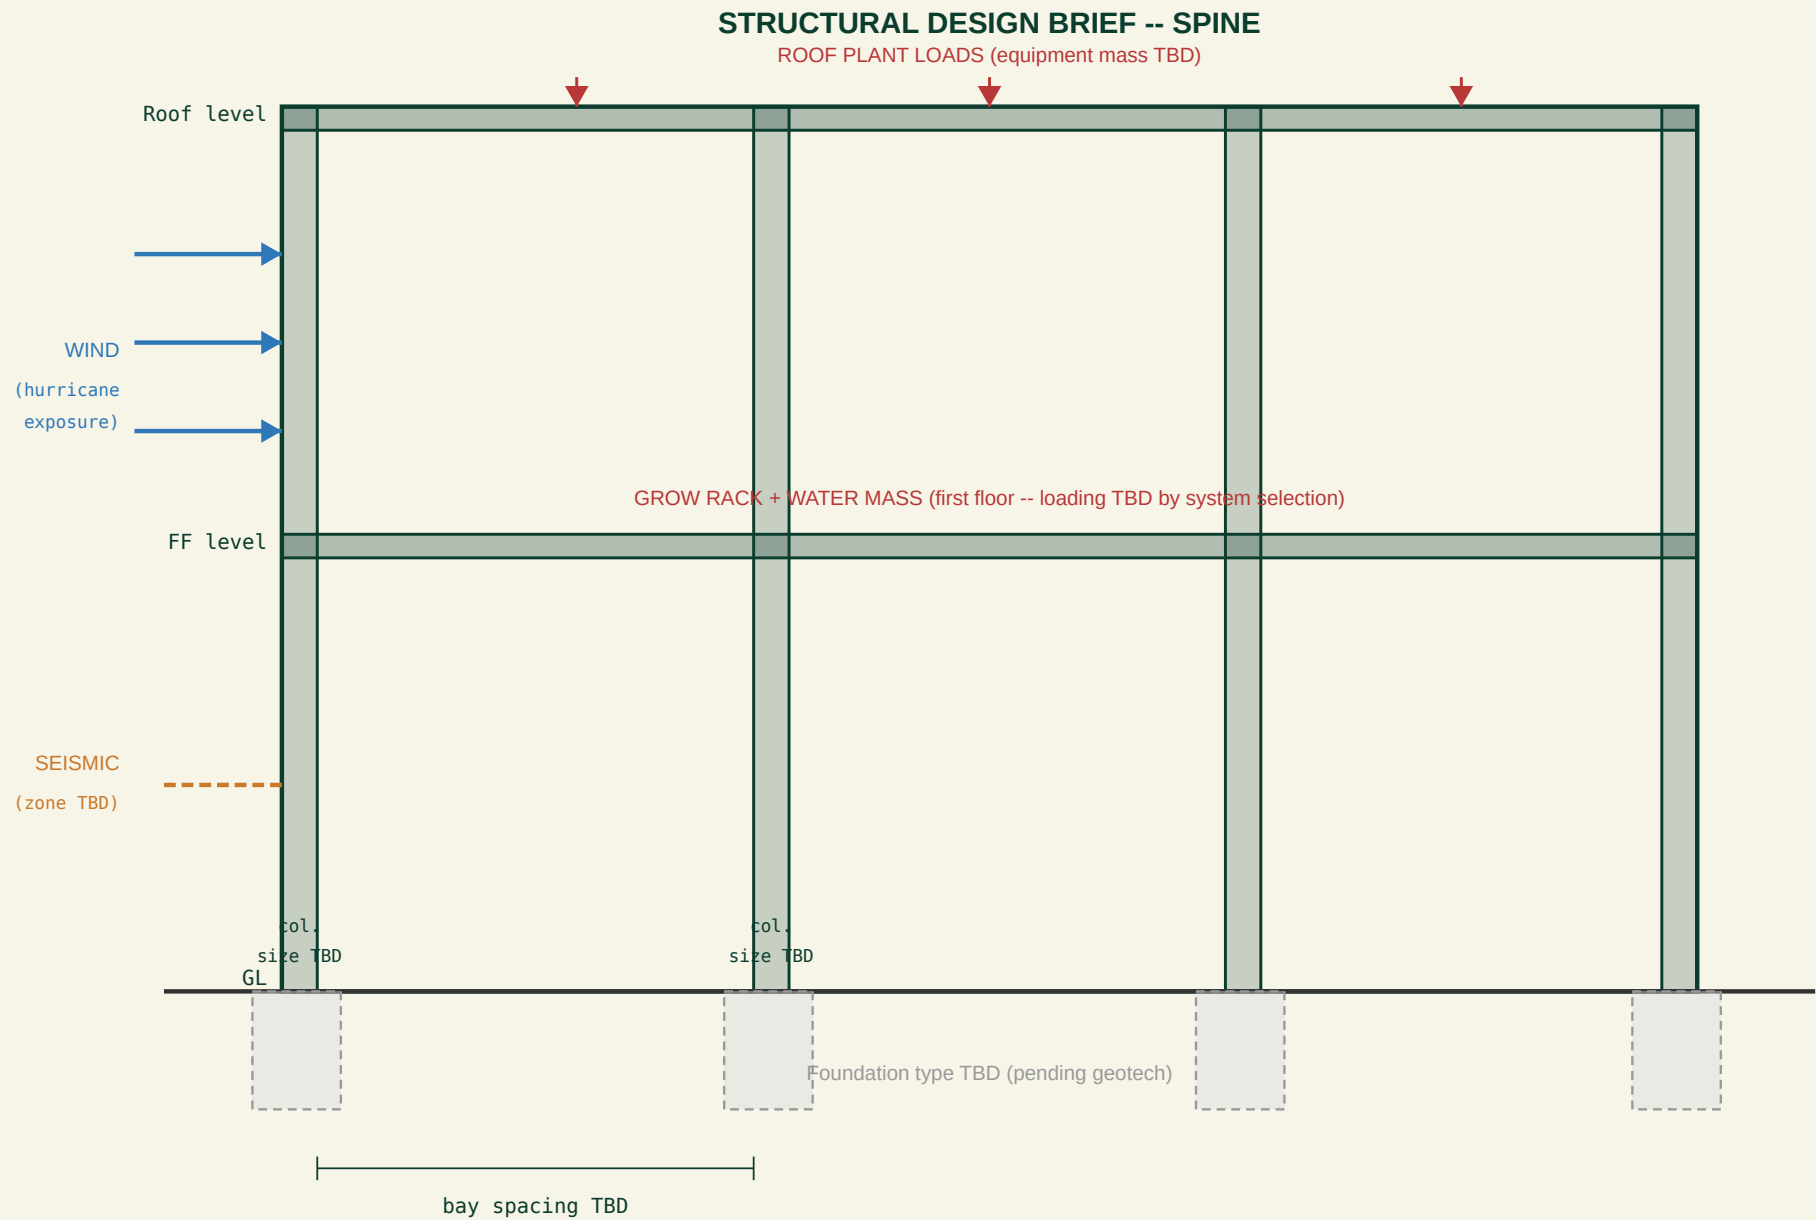

TECHNICAL NOTES


- N1 | Design brief only.** This is a structural design brief, not a structural design. No member sizes (no SHS, no UB sections), no reinforcement schedules, no connection details. These are outputs of the structural engineer's design, not inputs from the architect.
- N2 | Critical loads.** The first-floor structure must carry grow-rack dead loads plus water mass (potentially substantial for DWC systems). Actual loading depends on grow-system selection (T09) and cannot be assumed.
- N3 | Seismic and wind.** Trinidad is in a seismically active zone (exact classification to be investigated, not assumed). Hurricane wind loading applies. Both parameters require site-specific analysis per applicable codes.
- N4 | Foundation.** Foundation type (pad, strip, raft, piled) depends entirely on geotechnical investigation results. No footing dimensions have been assumed.

No structural member sizes. No reinforcement. No bay spacing. No footing dimensions. Structural design cannot proceed without geotechnical report and grow-system selection.

18 | Utility Yard Segregation and Sizing Brief

Duty-based layout for utility yard. No shortcut sizes -- all equipment sized from calculated loads, not assumed ratings. Segregation for safety and access.

UTILITY YARD -- SEGREGATION ZONES

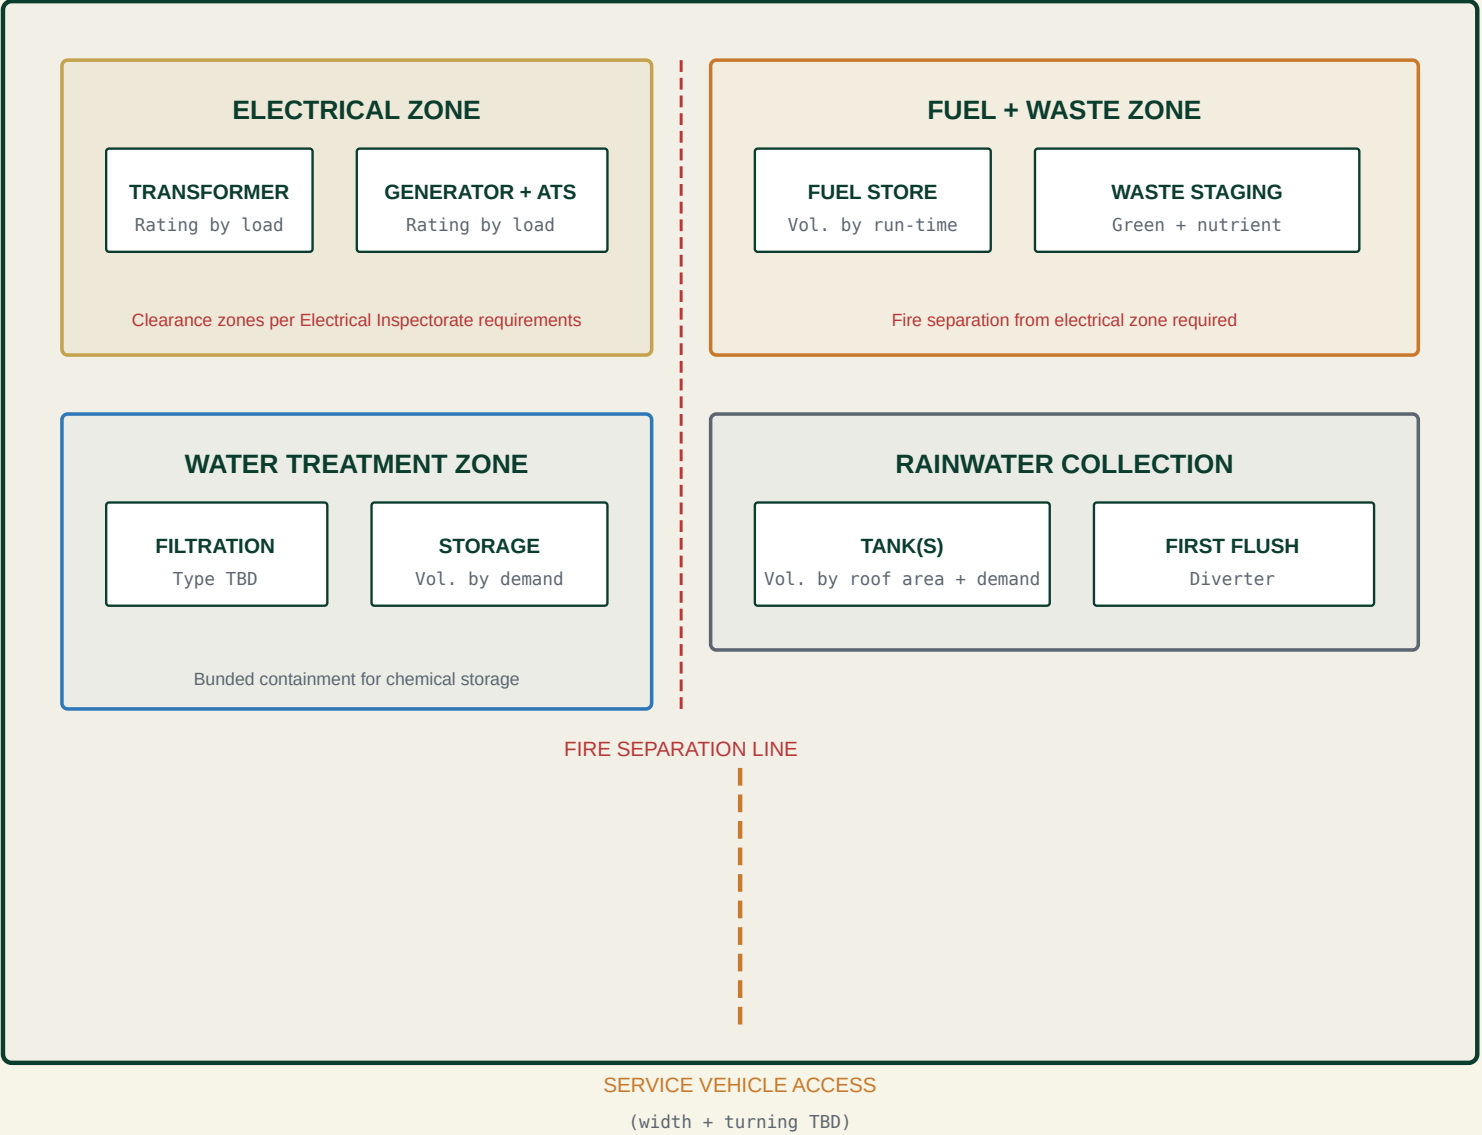

TECHNICAL NOTES

N1 | Duty-based sizing. Every piece of equipment in the utility yard is sized from calculated loads, not assumed ratings. Generator rating follows from connected-load analysis. Water storage follows from demand calculation. Fuel storage follows from generator run-time assessment.

N2 | Segregation. Electrical, fuel, water treatment, and waste zones must be physically separated with appropriate fire-rated barriers and clearance zones. The fire service and Electrical Inspectorate will have requirements that are not yet established.


N3 | Bunding and containment. Chemical stores (nutrients, pH buffers, cleaning agents) require bunded containment per EMA requirements. Fuel storage requires containment per fire code. Specific requirements to be confirmed.

No equipment sizes, no tank volumes, no clearance dimensions. All equipment positions are illustrative. Yard layout subject to fire service and utility provider requirements.

19 | Packhouse, Loading and Cold-Chain Interfaces

Post-harvest handling concept. Size from throughput, not assumptions. No dock height, no standard truck bed, no fixed operating hours assumed.

PACK HOUSE -- PROCESS FLOW

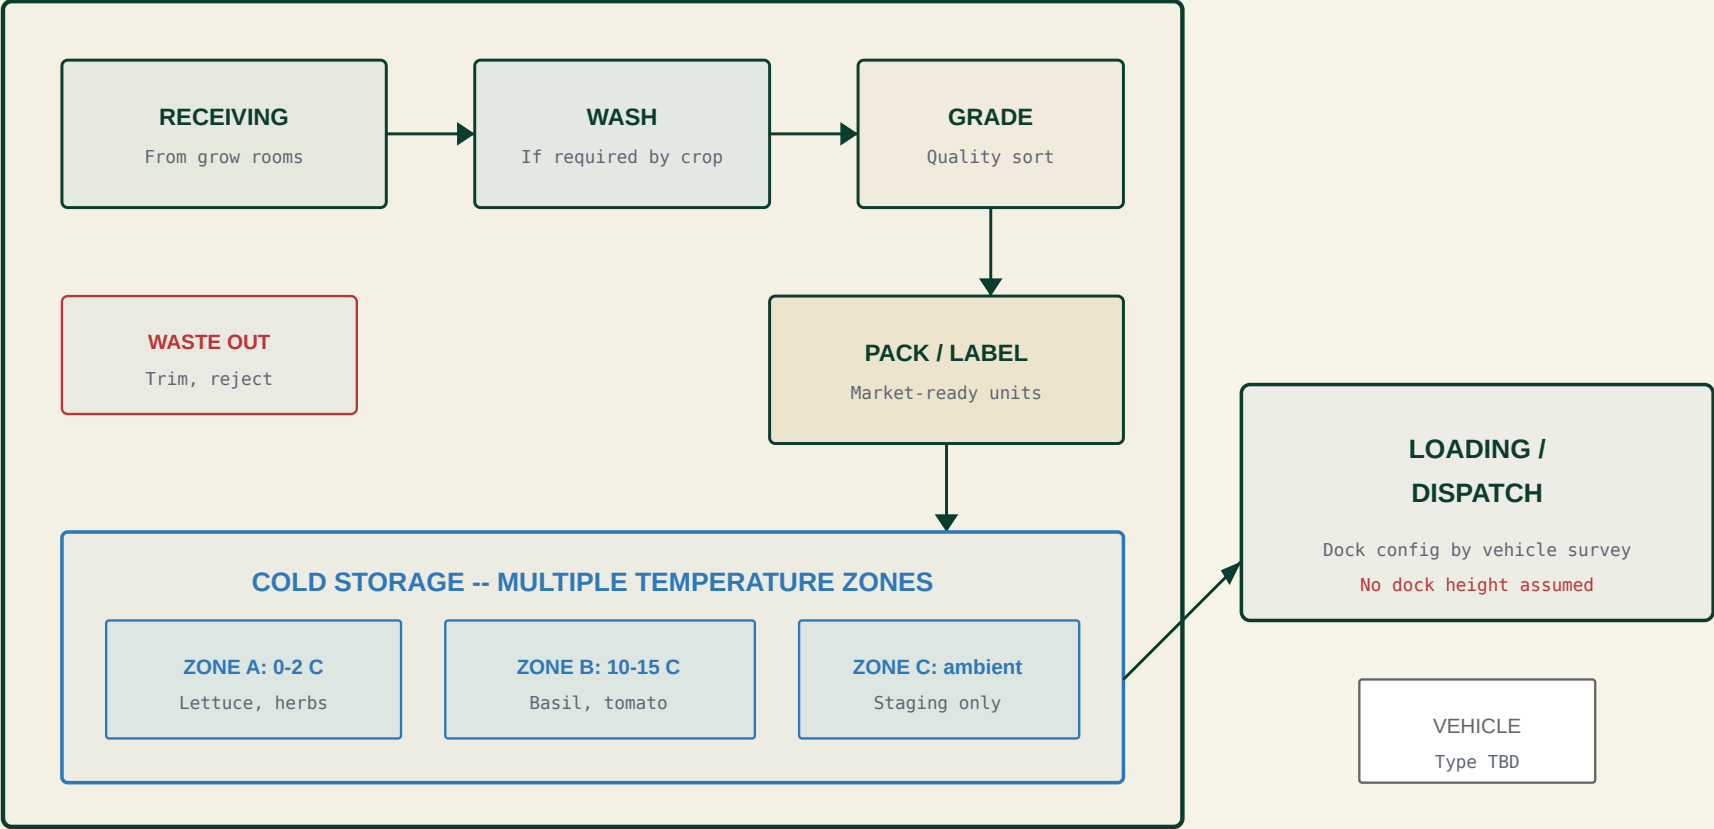

TECHNICAL NOTES

N1 | Size from throughput. Pack house dimensions, equipment capacity, and cold storage volume must be derived from production throughput analysis, not assumed. Throughput depends on crop mix and grow-system productivity -- neither is finalised.

N2 | Multiple temperature zones. Cold storage must support crop-specific temperatures (see T07). A single-temperature cold room is not adequate. Basil requires 10-12 C minimum; lettuce requires 0-2 C. These zones may be separate rooms or a zoned system.

N3 | No dock assumptions. No dock height, no "standard Caribbean truck bed height," and no fixed operating hours have been assumed. Loading dock configuration requires a survey of actual delivery vehicles used in the T&T market.

No equipment specifications. No room dimensions. Wash station requirements depend on crop type and food-safety regulations (to be established).

20 | Life Safety and Approval Responsibilities

Register of approval bodies and their jurisdictions. No compliance claimed -- all approvals "required" or "to be established." Nothing is "designed" or "compliant" at concept stage.

21 | Coordination Review and Drawing Register

Issues identified in the original HTML drawing set (20 tabs) and their dispositions. This sheet documents the review process and corrections applied in this revision.

#	Sheet	Issue Identified	Disposition	Status
1	All sheets	False precision: specific structural member sizes (SHS 200x200, UB 310x165), reinforcement (T16 @ 200 c/c), footing dimensions, bay spacing quoted	All specific sizes removed. Replaced with "TBD" or "size by design." Structural sizing is an output of engineering design, not an input from concept drawings.	REMOVED
2	T01, T04	Wing 0 area stated as 300 m2	Corrected to "approximately 279 m2, subject to verification by measured survey."	CORRECTED
3	T07, T10, T19	Universal 4 C cold chain assumed for all crops	Removed. Cold chain is now crop-specific per UC Davis guidelines. Basil is chilling-sensitive (10-12 C min). Tomato varies by maturity stage.	CORRECTED
4	T15	Only four biosecurity flows identified (missing Maintenance)	Maintenance added as fifth flow. All five flows now shown: People, Inputs, Harvest, Waste, Maintenance.	CORRECTED
5	T11	T&TEC and Government Electrical Inspectorate roles conflated	Roles distinguished: T&TEC = supply/connection/metering; Inspectorate = installation certification. Separate entities clearly identified.	CORRECTED
6	Multiple	Items marked "Designed" or "Compliant"	All such claims removed. Everything is now concept status. All approvals shown as "required" or "to be established."	REMOVED
7	T11	Specific generator kVA rating and equipment specs	Removed. Generator sizing requires connected-load analysis not yet performed. Duty-based descriptions used instead.	REMOVED
8	T08	Specific tank volumes and pipe diameters quoted	Removed. All volumes and sizes now shown as "TBD by demand calculation" or "TBD by duty."	REMOVED
9	T19	Assumed dock height, standard truck bed, fixed operating hours	Removed. Loading dock configuration requires actual vehicle survey. No assumptions about truck types or operating schedules.	REMOVED
10	T16	250 x 260m site boundary claim and 1:2000 scale stated	Removed. No site boundary dimensions claimed. No scale claimed. Boundary requires cadastral survey.	REMOVED
11	T17	Specific wind speed and seismic acceleration values stated	Removed. Wind and seismic parameters require site-specific analysis. Seismic zone to be investigated, not assumed.	REMOVED
12	T09, T18	Specific equipment specifications in schedules	Removed. Equipment described by duty (what it must do), not by specification (what model/size).	REMOVED
13	All sheets	Scale bars present on drawings	Removed. All drawings marked NTS (Not To Scale). No scale bars, no dimension chains, no figured dimensions.	REMOVED
14	New: T21	No coordination review or issue register existed	This sheet (T21) added to document the review process and track dispositions.	ADDED
15	New: T22	No references or evidence boundary documented	References sheet (T22) added with six key sources and notes on the evidence boundary of this drawing set.	ADDED

22 | References and Evidence Boundary

Sources referenced in this drawing set and the boundary of evidence supporting the concept design. This document does not claim to be a complete basis of design.

#	Source	Relevance to This Drawing Set	Notes and Caveats
1	EMA -- Certificate of Environmental Clearance (CEC) Rules Environmental Management Authority, Trinidad and Tobago	CEC requirements for construction and agricultural operations. Referenced in T12 (gate evidence), T16 (scale-site EIA trigger), T20 (approval responsibilities).	CEC applicability to CEA/greenhouse operations must be confirmed directly with EMA. Requirements may differ from conventional agriculture or conventional construction.
2	DevelopTT (InvestTT / formerly BDC) Investment promotion and facilitation, Government of Trinidad and Tobago	Incentive programmes, investment facilitation, and agricultural development policies that may apply to CEA operations.	Applicability of any incentive programme must be confirmed directly. Eligibility criteria, application processes, and current availability are subject to change.
3	Government Electrical Inspectorate Ministry of Public Utilities, Trinidad and Tobago	Installation certification requirements. Distinguished from T&TEC (supply) in T11 and T20. Certification required before energisation of any electrical installation.	Current standards, application process, and inspection requirements must be confirmed directly with the Inspectorate. Requirements may apply to generator installations as well as mains-connected systems.
4	T&TEC -- Tariff Schedule and Connection Requirements Trinidad and Tobago Electricity Commission	Grid connection (60 Hz), supply capacity, metering, and tariff structure. Referenced in T11. CEA operations are electricity-intensive; tariff structure materially affects operating cost.	Current tariff rates, demand charges, connection lead times, and capacity at Carlsen Field must be confirmed through formal T&TEC application. Off-peak/on-peak rate structures may influence operating schedules.
5	UC Davis Postharvest Technology Center Produce Facts sheets: herbs (basil, cilantro, mint, parsley) and tomato	Crop-specific postharvest handling temperatures and conditions. Referenced in T07 (process flow), T10 (HVAC), T19 (cold chain). Basil chilling sensitivity (do not store below 10-12 C) is a critical design driver.	UC Davis guidelines are research-based and widely referenced. However, cultivar-specific responses, local conditions, and market expectations may require adjustment. Shelf-life data are indicative, not guaranteed.
6	UWI (University of the West Indies) -- CEA and Greenhouse Research Faculty of Food and Agriculture / Faculty of Engineering, St Augustine campus	Regional CEA research applicable to Caribbean climate conditions. UWI greenhouse studies provide local data on heat load, humidity management, and crop performance in tropical environments.	Specific publications and datasets to be identified. UWI research is regional and may require validation against site-specific conditions at Carlsen Field. Collaboration opportunities to be explored.

EVIDENCE BOUNDARY STATEMENT

This drawing set is bounded by the following limitations:

- No cadastral survey has been conducted. Site boundary is approximate.
- No geotechnical investigation has been performed. Soil conditions are unknown.
- No structural survey of Wing 0 has been conducted. Condition is assumed adequate pending verification.
- No T&TEC connection application has been made. Grid capacity is unconfirmed.
- No WASA connection application has been made. Water supply is unconfirmed.
- No EMA CEC application has been made. Environmental clearance requirements are unconfirmed.
- No crop trial data exists for this site. All crop assumptions are based on published literature, not local testing.
- No market study has been conducted for CEA produce in the Trinidad and Tobago market.

This drawing set represents concept-stage design thinking. It is not a basis of design, not a tender document, not a construction document, and not a regulatory submission. Every statement in these drawings is subject to verification, and no statement should be relied upon without independent professional review.